


Fixed Foot Replacement

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

Procedure for installing the Fixed Foot on Little Giant Ladder Systems **Extension** ladders.

1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. If you have any questions concerning the use of this kit on Little Giant Ladder Systems products, call 800-453-1192 for assistance.
3. Before installing this kit, identify all kit components. If any components are missing or damaged, please contact Customer Care. Do not substitute any components.
4. Inspect the ladder before installing this kit. Repair or replace any damaged or missing ladder parts before using the ladder. Use only Little Giant Ladder Systems repair or replacement parts. If you are unable to repair it, discard the ladder.

COMPONENTS IN KIT

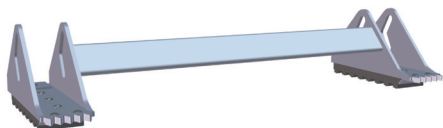

(1) Fixed Foot



(2) Hex Head Bolt



(2) Center Nut



(4) 3/8" Washer


TOOLS NEEDED

(2) 9/16" Wrench




NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, DISCARD THE LADDER OR CONTACT CUSTOMER CARE FOR INSTRUCTIONS.


DO NOT USE A DAMAGED LADDER!

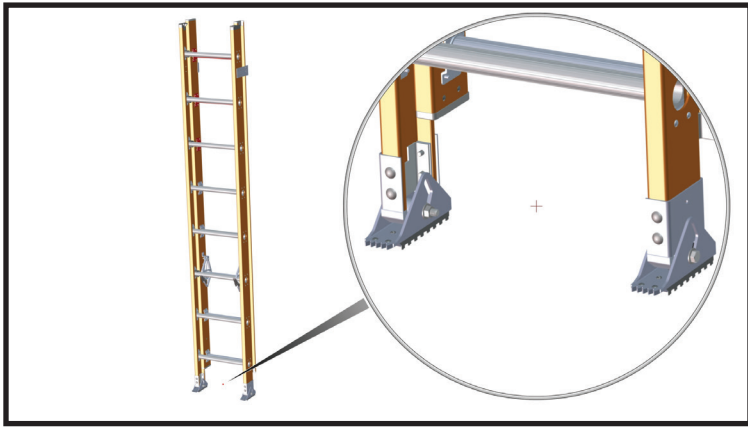


1. Identify the feet that you will be replacing on your extension ladder.

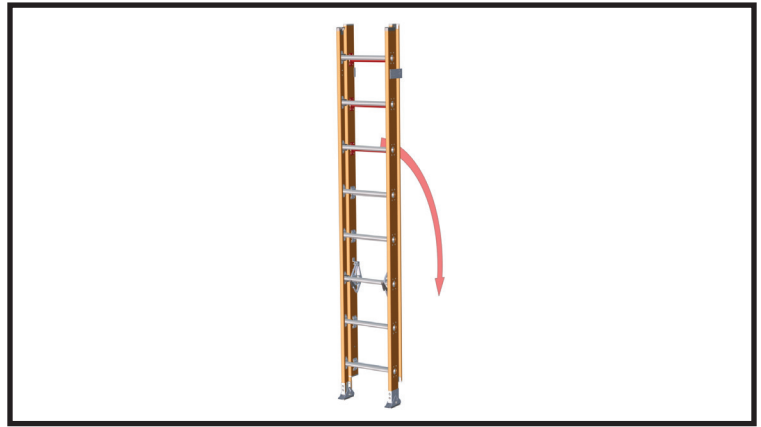


2. Lay the ladder on its face to make the following steps easier.

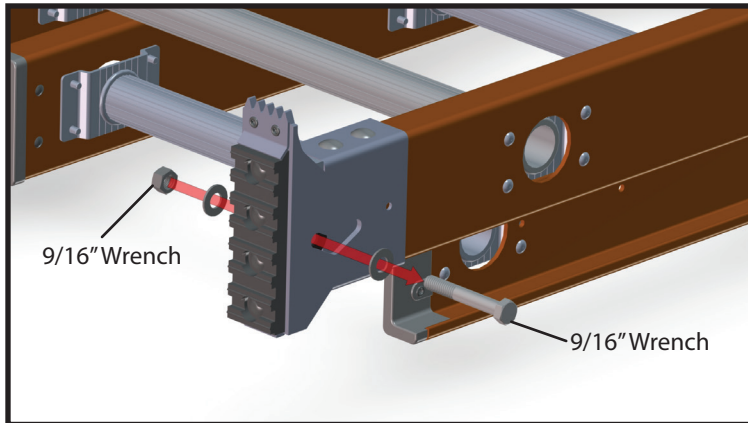


3. Using (2) 9/16" wrenches, loosen and remove the (2) washers, bolt and nut that are holding the (existing) foot in place.

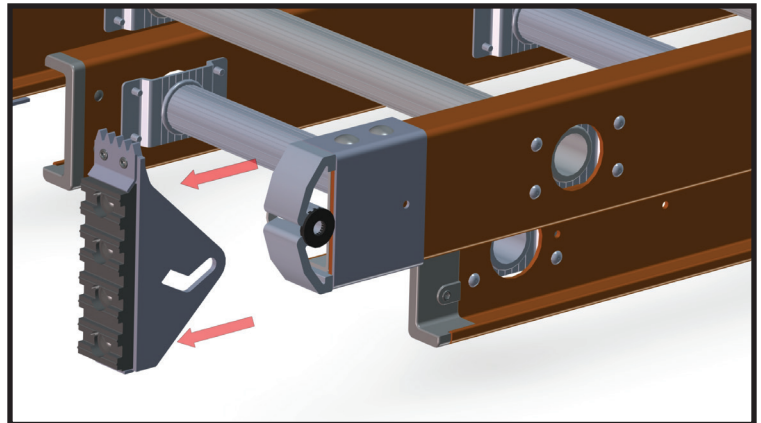


4. Remove (existing) foot.

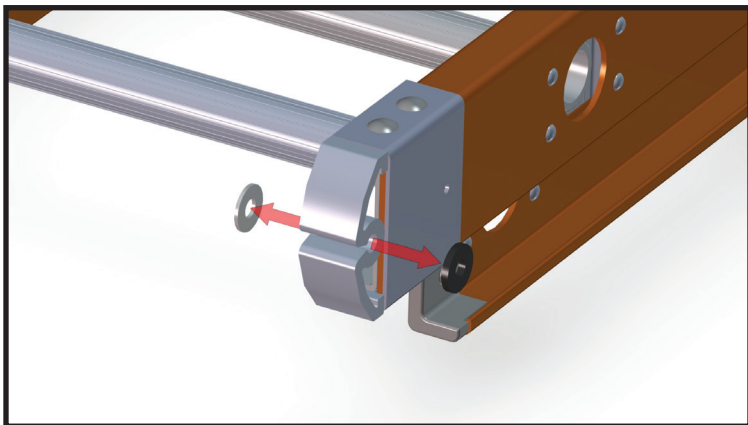


5. Remove the (existing) spacers from the internal foot bracket

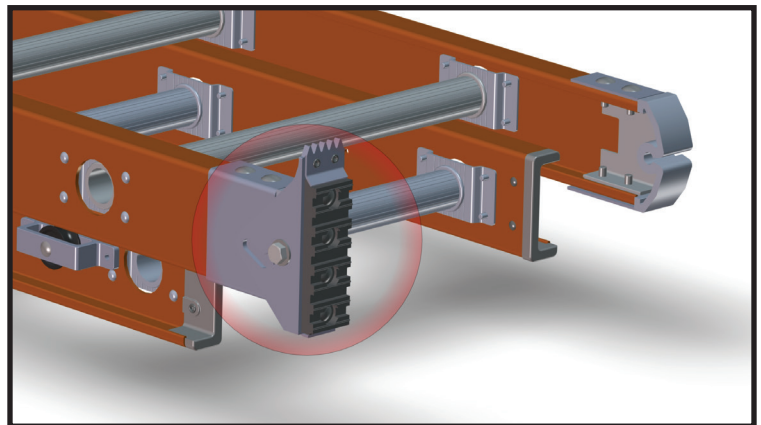


6. Repeat steps 3-5 on the adjacent foot.

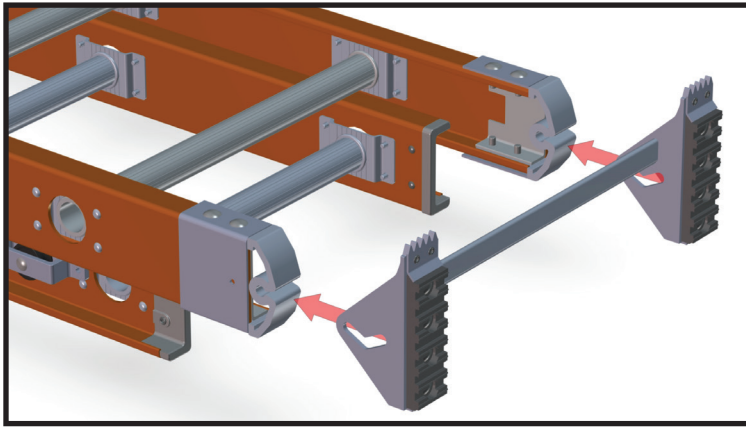


7. Once both feet have been removed, insert the (new) fixed foot onto the ladder.

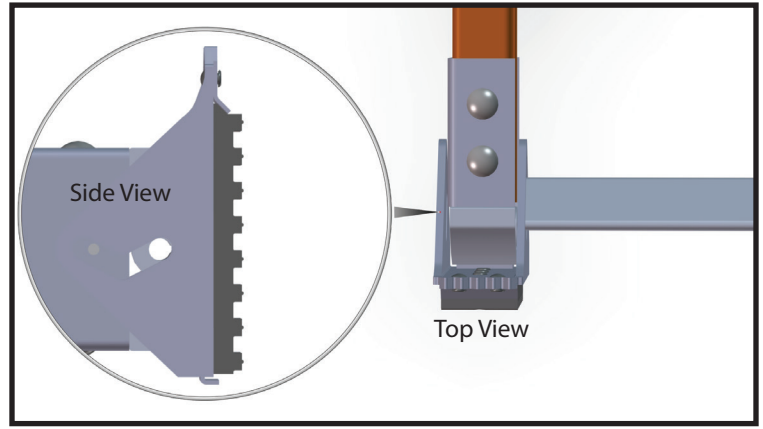


8. Make sure that the picked plate on the foot is facing (down) or the back of the ladder. (As shown in the illustration.)

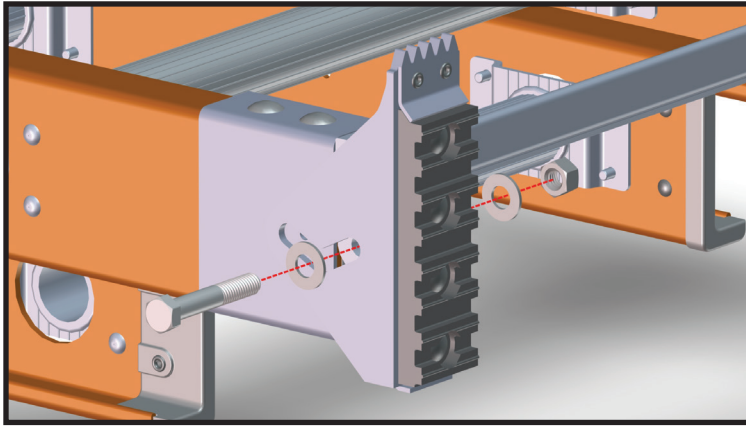


9. Insert the (new) bolt, washers and nut onto and through the (new) fixed foot, as shown in the illustration.

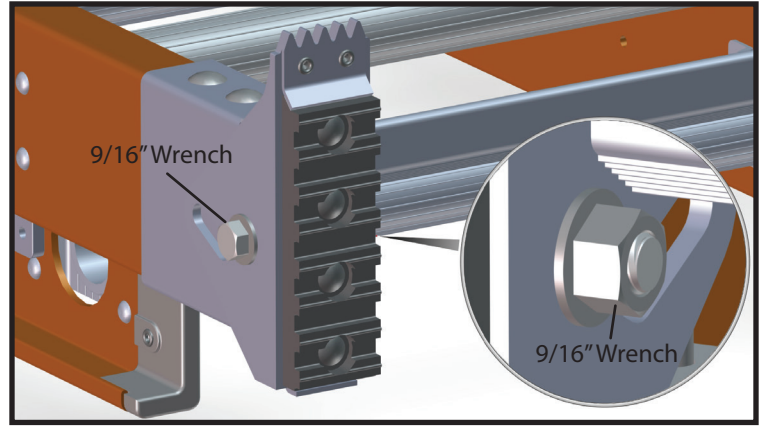

10. Tighten using (2) 9/16" wrenches.

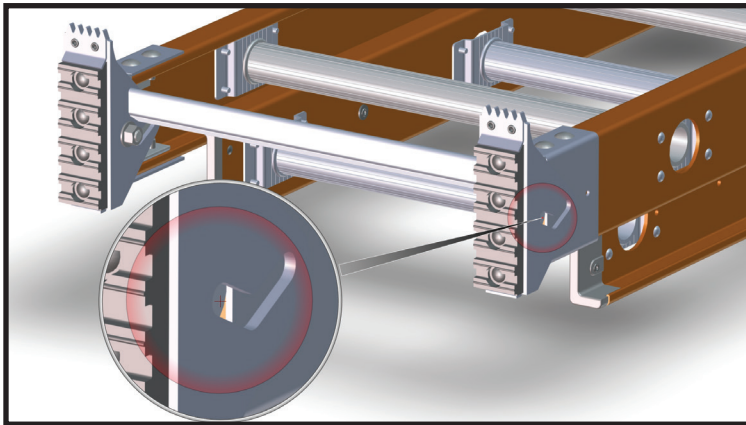

11. Repeat steps 9 and 10 on the adjacent foot.

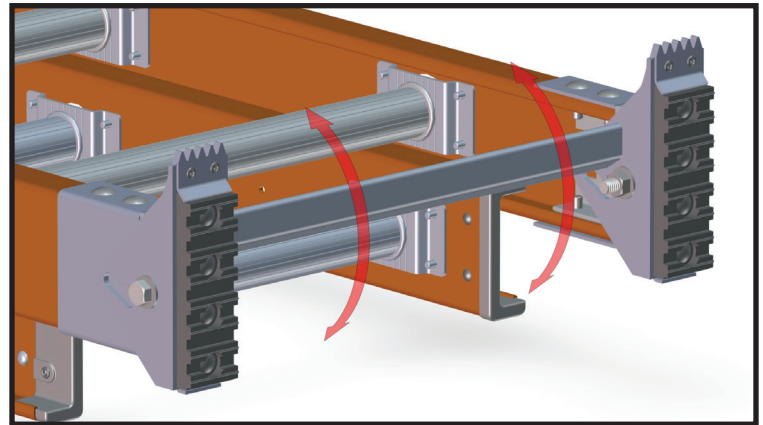

12. Once all of the steps have been completed, rotate the (new) fixed foot to make sure it rotates freely.