

Little Giant®

Ladder Systems

HANDLE REPLACEMENT, SELECT STEP

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. Before installing this kit, identify all kit components. If any components are missing, damaged or if you have any questions concerning the use of this kit on Little Giant Ladder Systems® products, please contact our Customer Experience Team at 800-453-1192. Do not substitute any components.
3. Inspect the ladder before installing this kit. Repair or replace any damaged or missing parts before using the ladder. Use only Little Giant Ladder Systems® replacement parts. If you are unable to repair it, discard the ladder.

COMPONENTS INCLUDED



HANDLE [1]



SCREW [1]



SCREW CAP [1]

TOOLS REQUIRED




SCREWDRIVERS:
FLAT HEAD [1]
PHILLIPS HEAD [1]




NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, Please contact our customer experience team for assistance at 800-453-1192.
DO NOT USE A DAMAGED LADDER!


BREAKDOWN

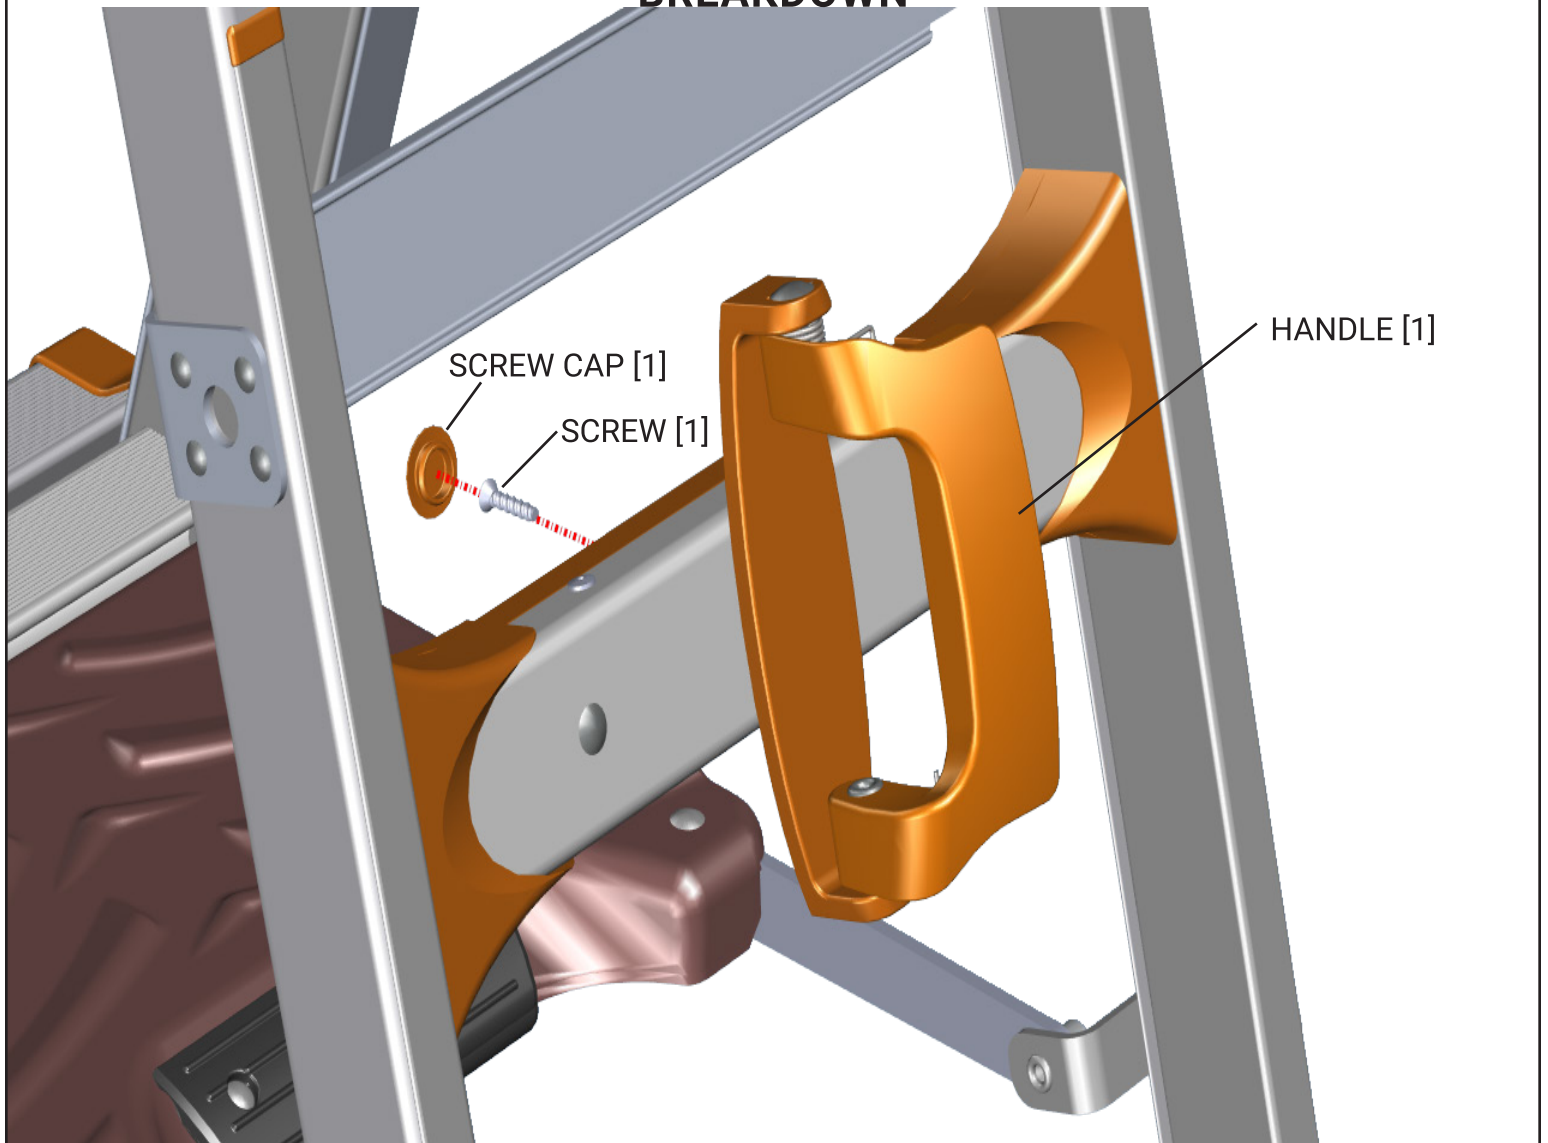


1. Identify the Select Step handle that needs to be replaced.

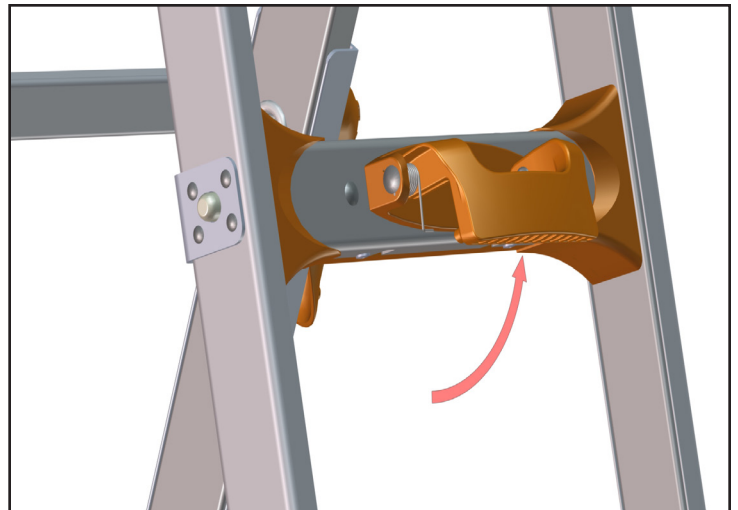


2. Pull up on the handle.

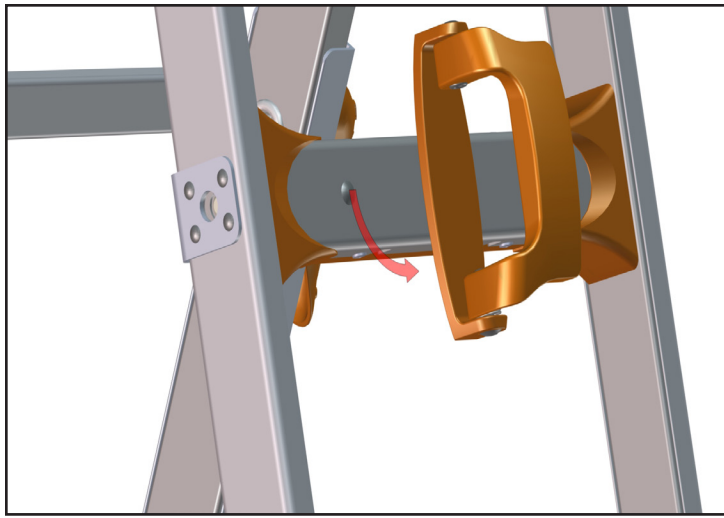


3. Twist the handle to release the outer section from the inner.

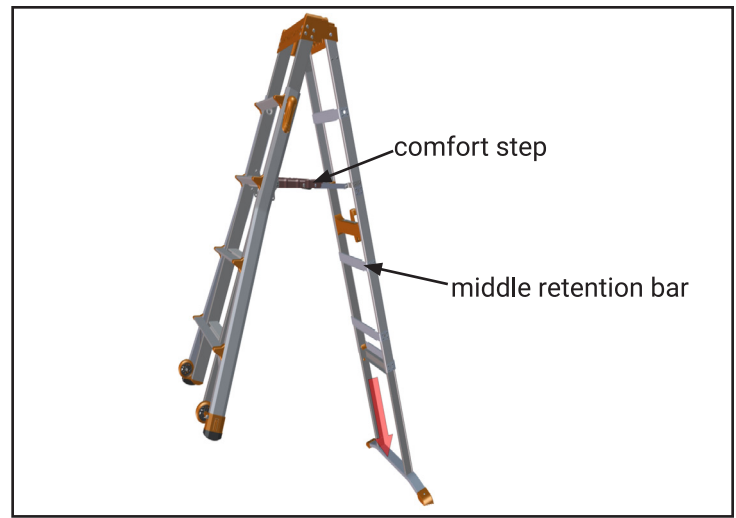


4. Slide the inner section down, position the handle between the comfort step and the middle retention bar to make the following steps easier.

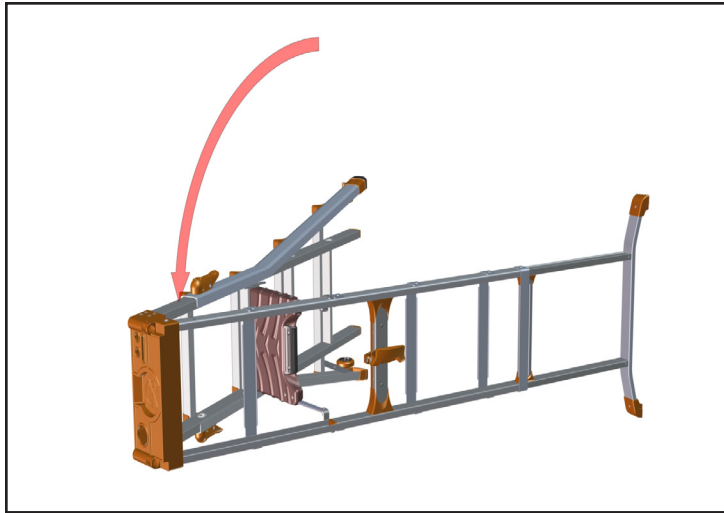


5. Lay the ladder on its side to make the following steps easier.

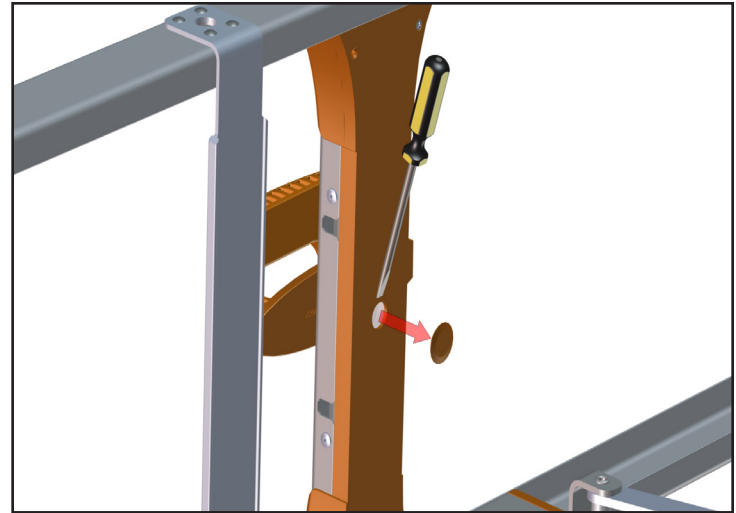

6. Using a flathead screwdriver, pop the (existing) screw cap off of the handle. (Once free, discard the existing screw cap)

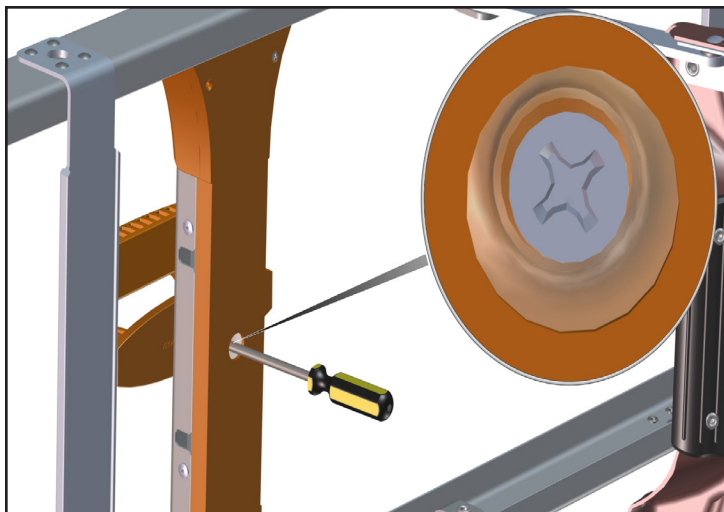

7. Using a Phillips head screwdriver, loosen and remove the (existing) screw holding the handle in place. (Once free, discard the existing screw)

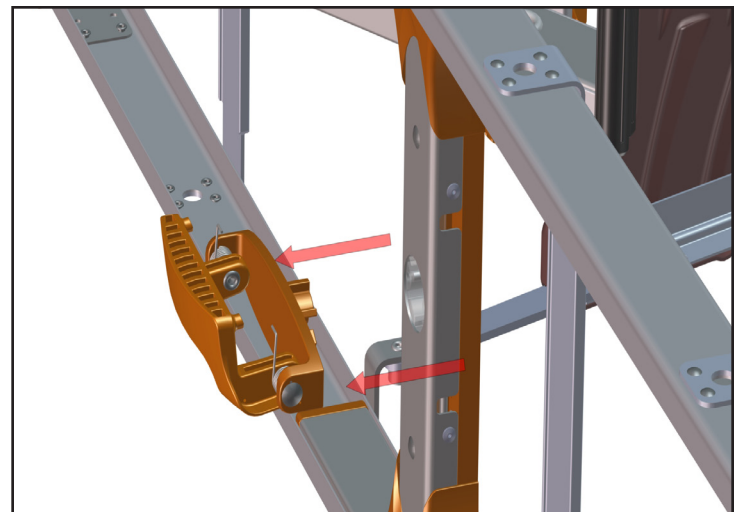

8. Remove the (existing) handle, and discard.

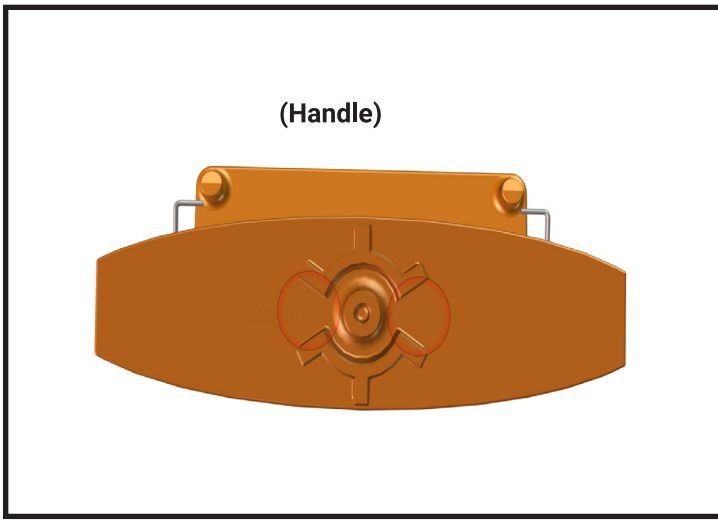


Figure 1



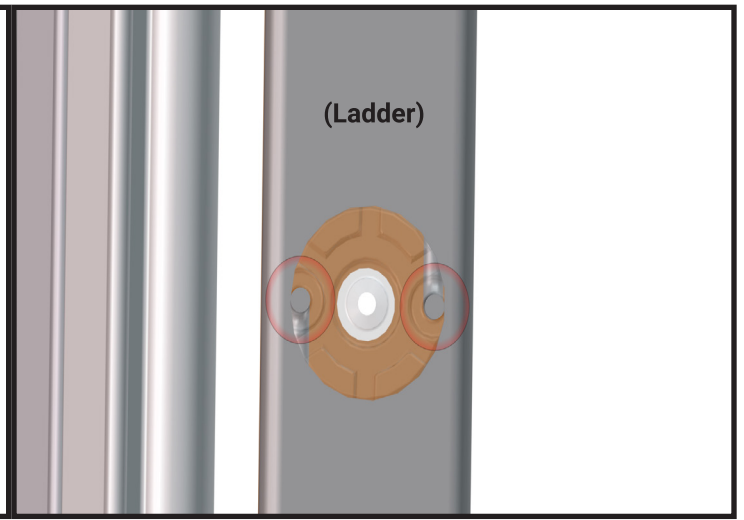



Figure 2

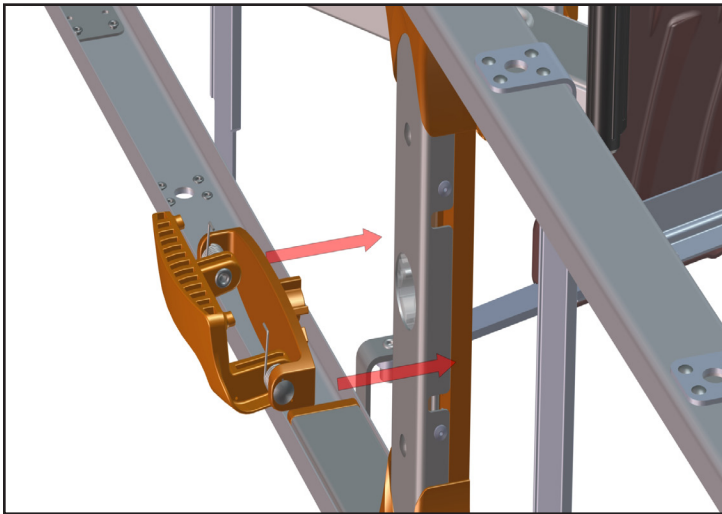

9. Line up the openings on the bottom of the (new) handle (as seen in Figure 1) with the bars on the ladder (as seen in Figure 2). When they are aligned, the handle should slide into place.

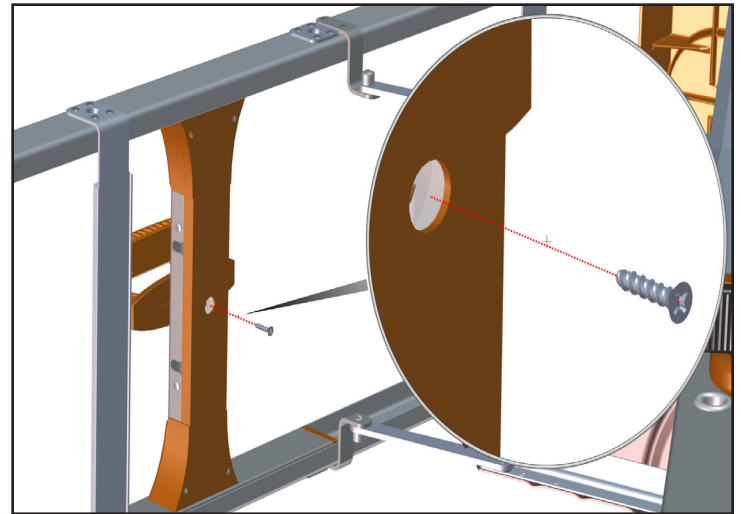


10. Using a Phillips head screwdriver, insert and tighten the (new) screw.

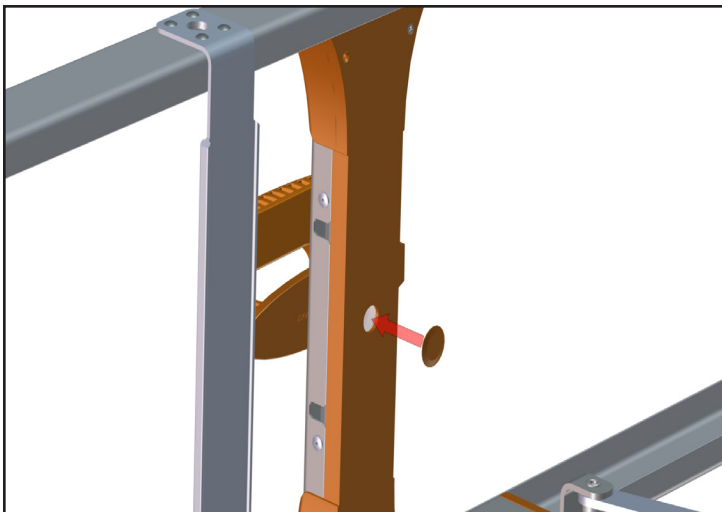

11. Using your thumb, pop the (new) screw cap into place.



12. Stand the ladder back up and slide the inner section up into the "standard" position.

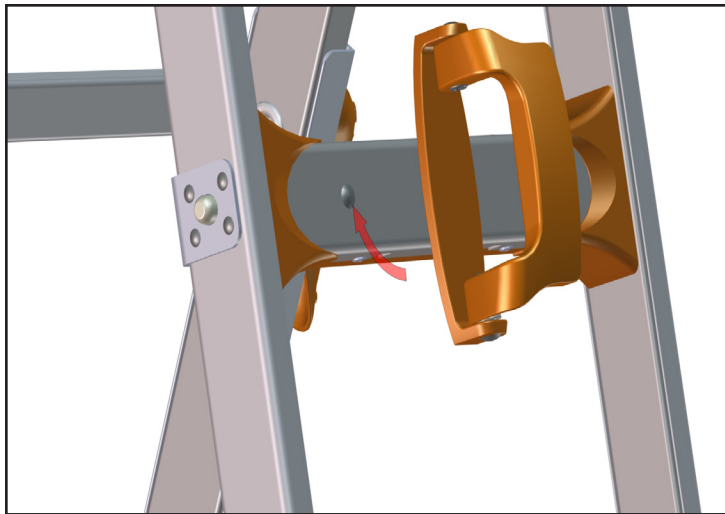

13. Rotate the Handle back into its "home" position.



14. Once all of the steps have been completed, make sure the ladder is completely stable before use.