

# Little Giant®

## Ladder Systems

### STRAP REPLACEMENT, SKYSCRAPER

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. Before installing this kit, identify all kit components. If any components are missing, damaged or if you have any questions concerning the use of this kit on Little Giant Ladder Systems® products, please contact our Customer Experience Team at 800-453-1192. Do not substitute any components.
3. Inspect the ladder before installing this kit. Repair or replace any damaged or missing parts before using the ladder. Use only Little Giant Ladder Systems® replacement parts. If you are unable to repair it, discard the ladder.



#### COMPONENTS INCLUDED




#### TOOLS REQUIRED




NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, Please contact our customer experience team for assistance at 800-453-1192.  
DO NOT USE A DAMAGED LADDER!

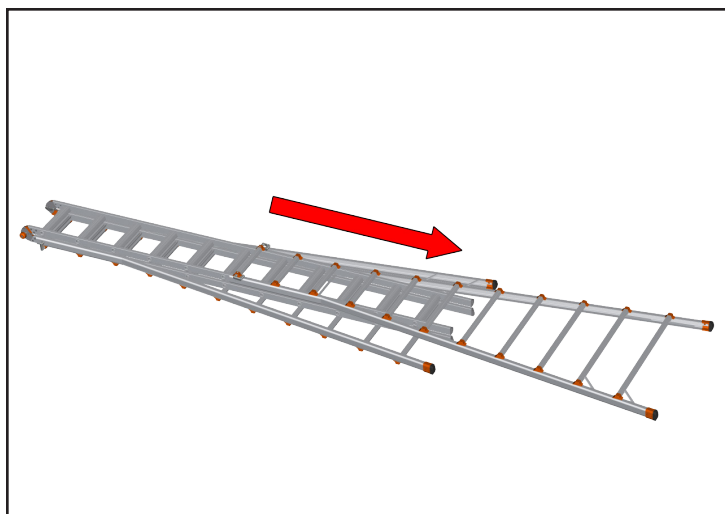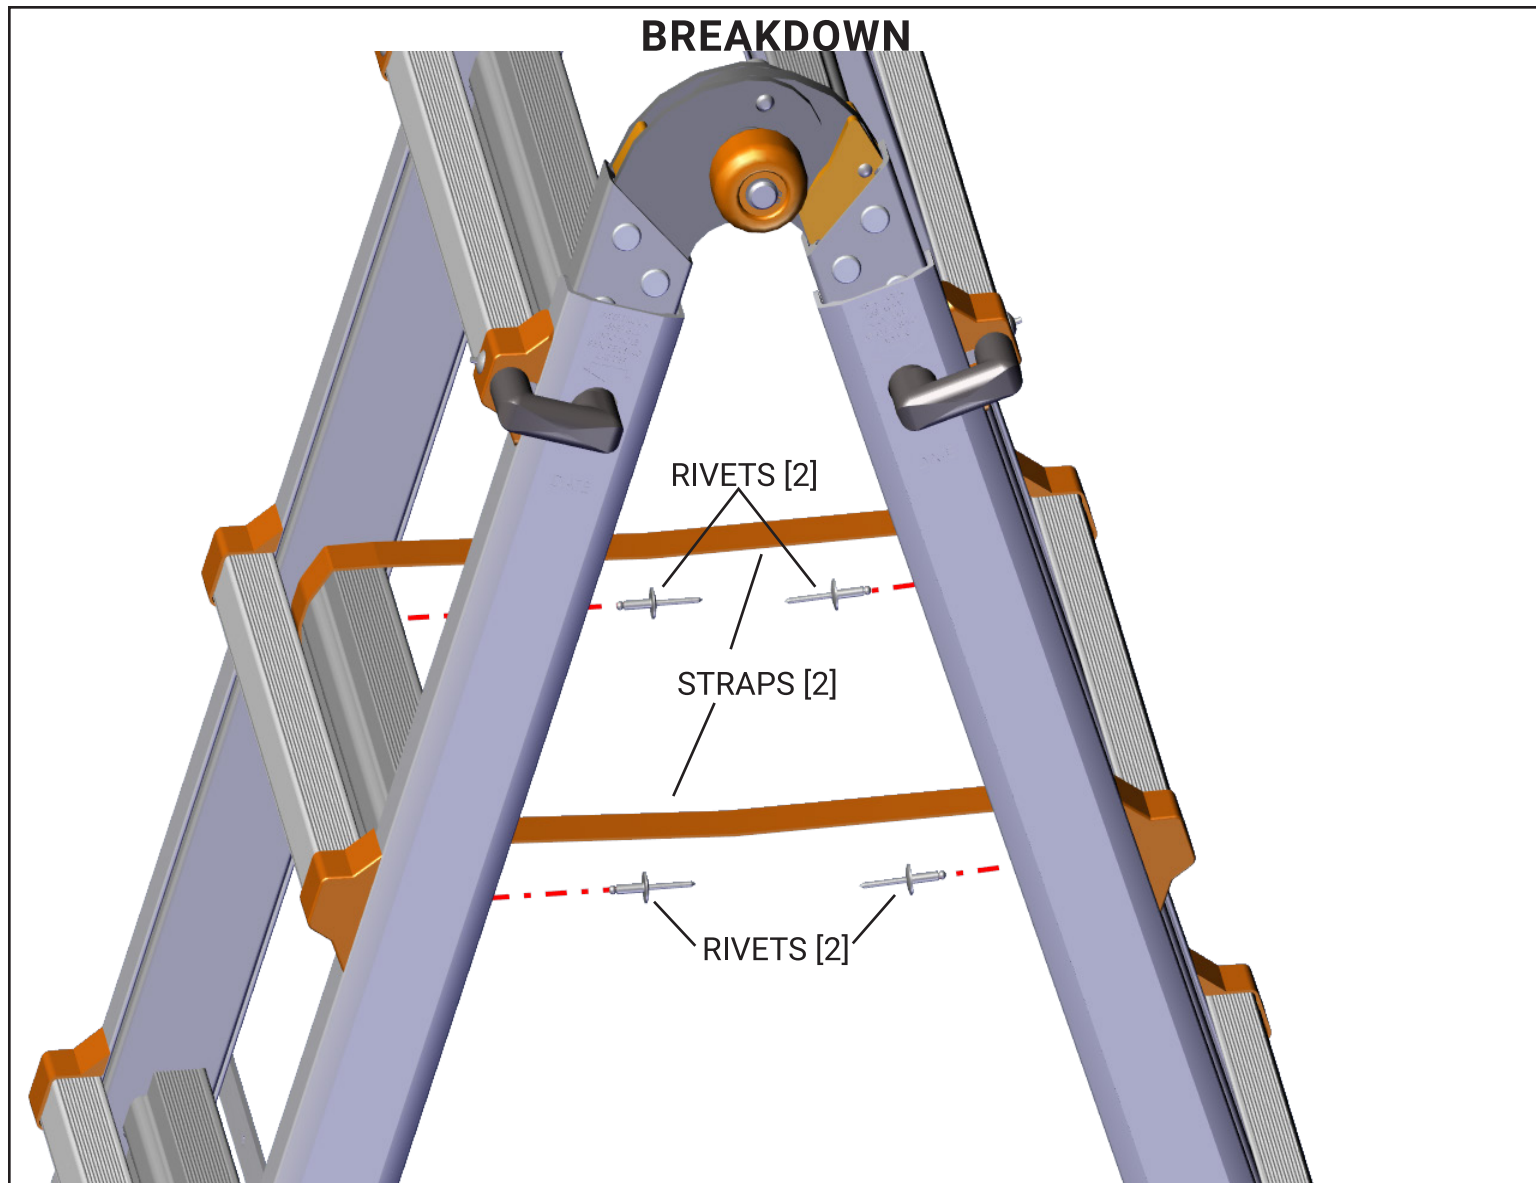


1. Slide the outer sections off and set aside.

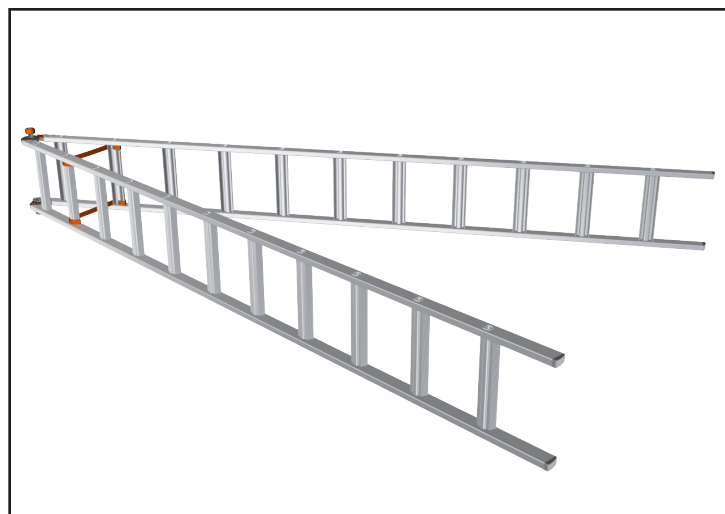


2. Lay the inner section on its side and open enough to access the strap rivets.

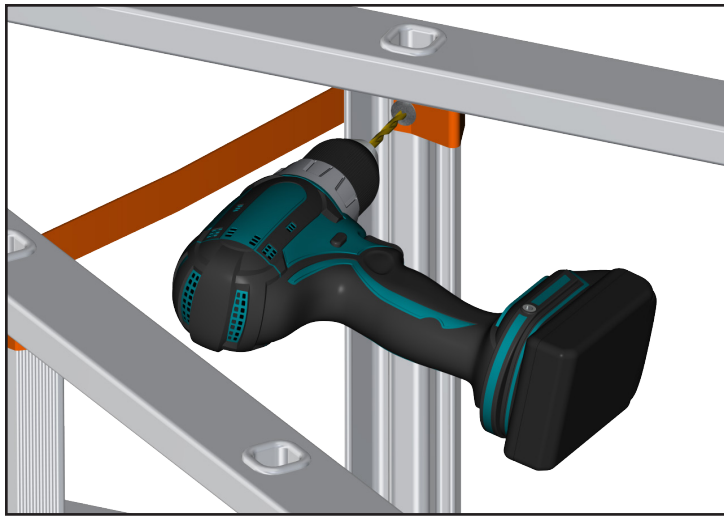


3. Using a 3/16" bit, drill through the center of the rivet head securing the straps. Do not drill past the rivet head.

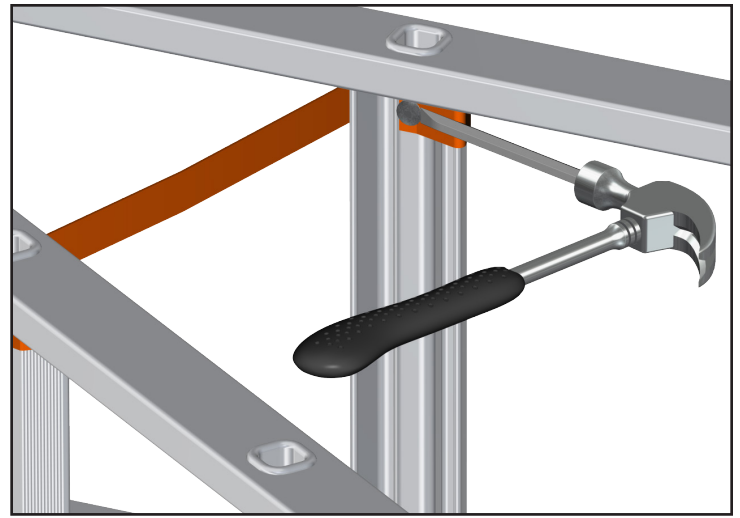


4. Chisel off the remaining rivet head material.

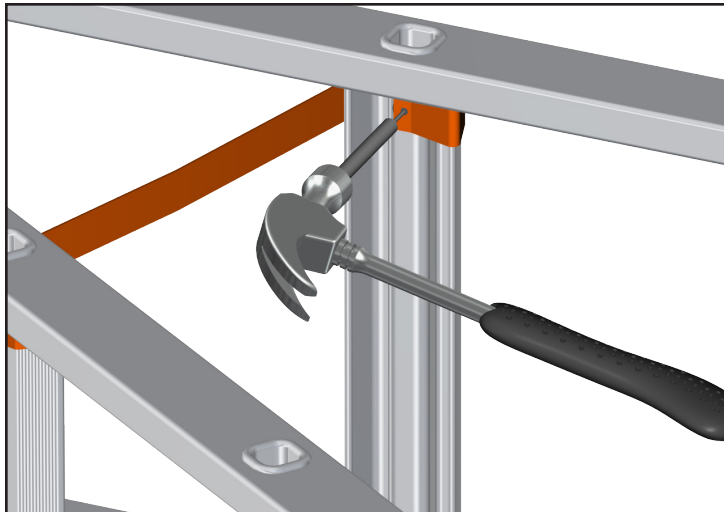


5. Tap the rivet out of the rung with a 3/16" punch.

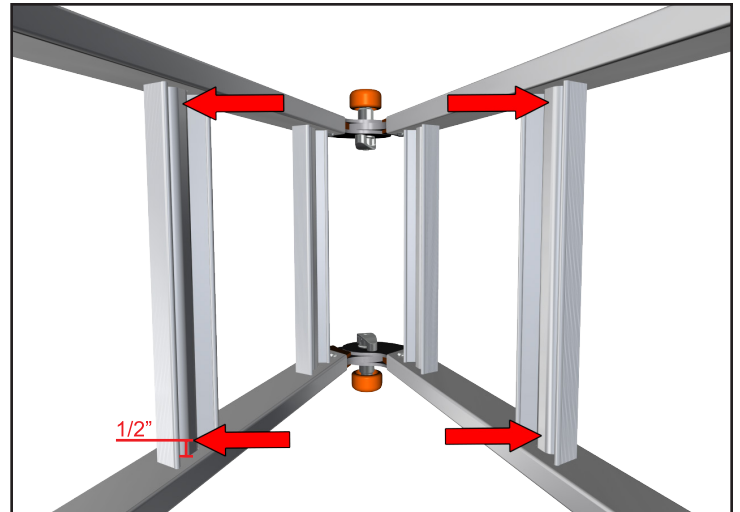


6. Mark the inside of the 2nd rungs from the top, 1/2" in from the rail on each side, along the centerline. Note: If straps were already riveted here, skip to step 8. Repeat steps 2-4 on remaining strap rivets.

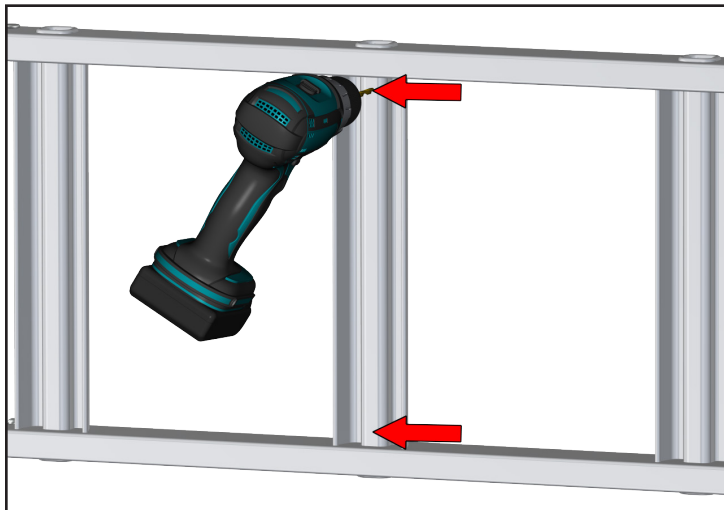


7. Using a 3/16" bit, drill new holes through the center of the rungs where marked. Be careful to only drill through the inner wall of the rung.

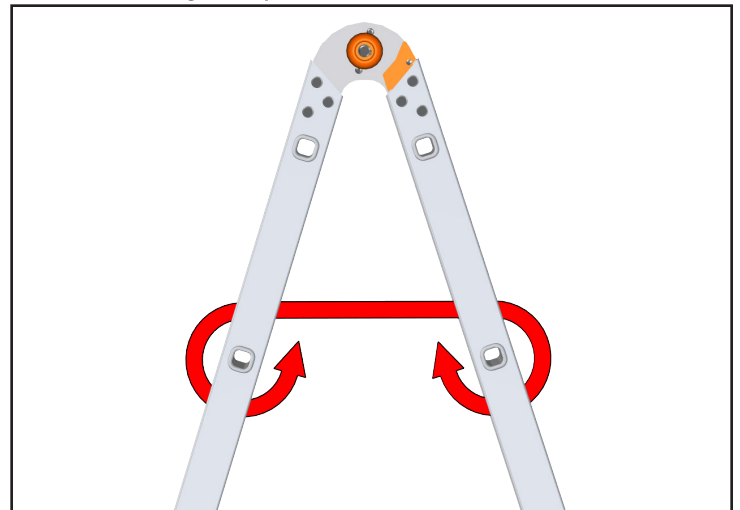

8. Wrap the straps around the 2nd rungs down from top to bottom.

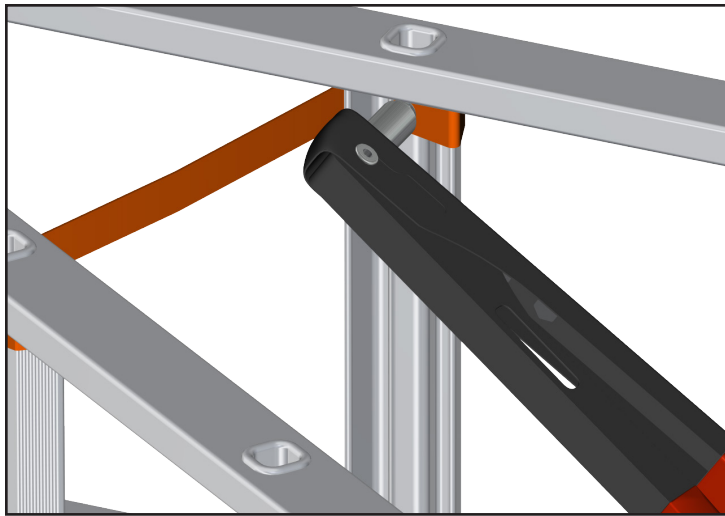

9. Insert the new rivets and set with rivet gun.

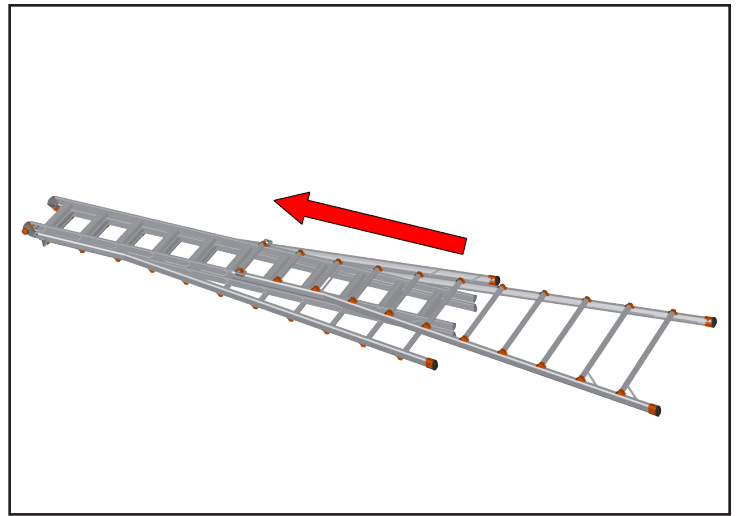

10. Slide the outer sections back on.



11. Confirm the straps are securely fastened and hinge fully locks into position before use.