



CLIMB ON

OUTRIGGER BOLT REPLACEMENT

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

Procedure for replacing the Outrigger Shoulder Bolt on Little Giant Ladder Systems **HYPERLITE™ SUMOSTANCE®** ladders.

1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. Before installing this kit, identify all kit components. If any components are missing, damaged or if you have any questions concerning the use of this kit on Little Giant Ladder Systems products, please contact our Customer Experience Team at 800-453-1192. Do not substitute any components.
3. Inspect the ladder before installing this kit. Repair or replace any damaged or missing parts before using the ladder. Use only Little Giant Ladder Systems repair or replacement parts. If you are unable to repair it, discard the ladder.

COMPONENTS IN KIT



(1) SHOULDER BOLT

(1) NYLON LOCK NUT

TOOLS NEEDED

7/16"
WRENCH




5/32"
ALLEN WRENCH




NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, PLEASE CONTACT OUR CUSTOMER EXPERIENCE TEAM FOR ASSISTANCE AT 800-453-1192.


DO NOT USE A DAMAGED LADDER!

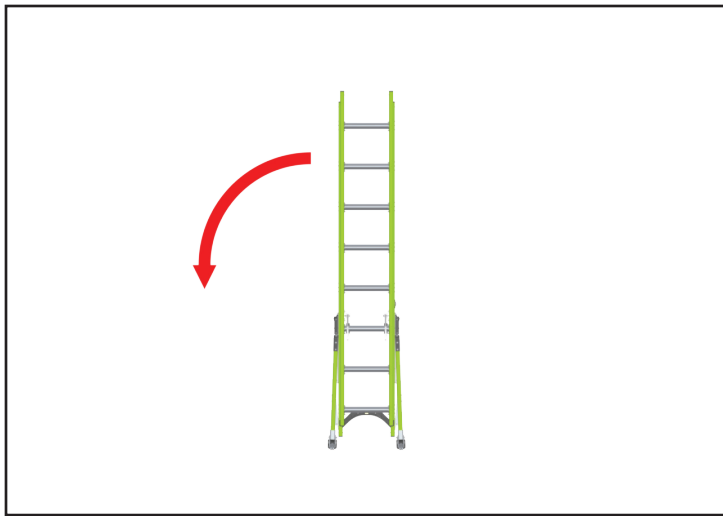

1. Lay the ladder on its side with the bolt being replaced facing up.

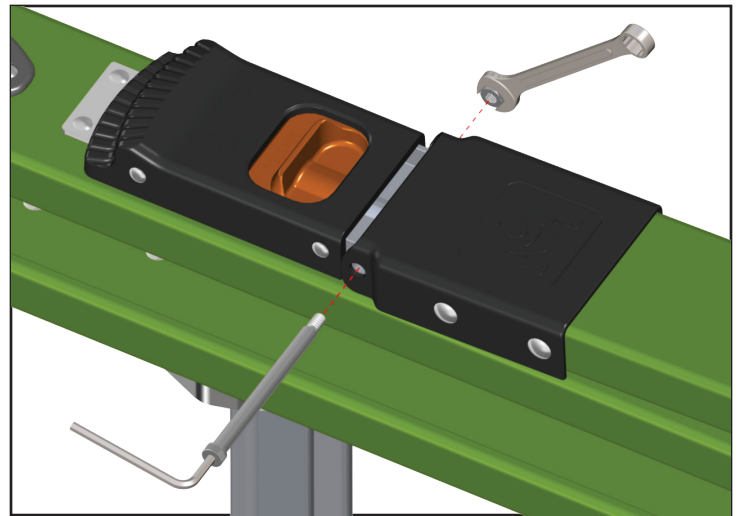

2. Using a 5/32" Allen wrench and 7/16" wrench, remove and discard the existing shoulder bolt and lock nut.

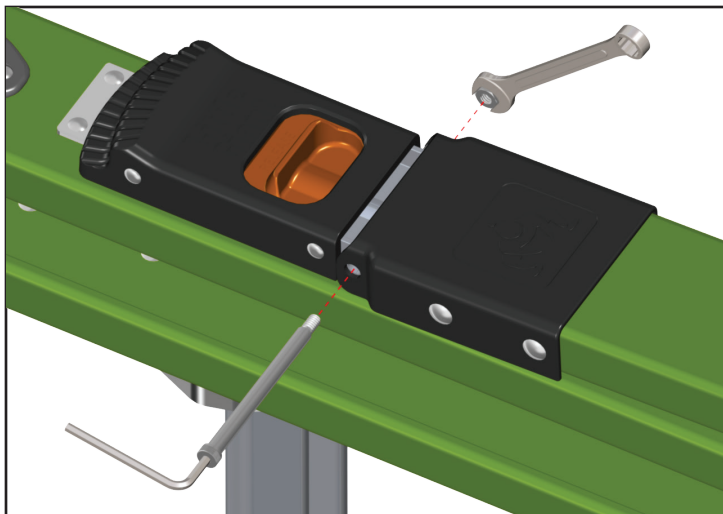

3. Using a 5/32" Allen wrench and 7/16" wrench, align and tighten the new shoulder bolt and lock nut.



4. Confirm outrigger is secure and functioning properly before use.