

STRAP KIT INSTALLATION


RETAIN INSTRUCTIONS FOR FUTURE REFERENCE

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

Procedure for installing the strap kit on Little Giant Ladder Systems **HYPERLITE™ LIMITED ARREST SYSTEM** and **HYPERLITE™ SUMOSTANCE® LIMITED ARREST SYSTEM** ladders.


1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. Before installing this kit, identify all kit components. If any components are missing, damaged or if you have any questions concerning the use of this kit on Little Giant Ladder Systems products, please contact our Customer Experience Team at 800-453-1192. Do not substitute any components.
3. Inspect the ladder before installing this kit. Repair or replace any damaged or missing parts before using the ladder. Use only Little Giant Ladder Systems replacement parts. If you are unable to repair it, discard the ladder.

COMPONENTS IN KIT



(1) UPPER STRAP SET

AND/OR




(1) LOWER STRAP SET




(1) INSTRUCTION LABEL

NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, PLEASE CONTACT OUR CUSTOMER EXPERIENCE TEAM FOR ASSISTANCE AT 800-453-1192.


DO NOT USE A DAMAGED LADDER!

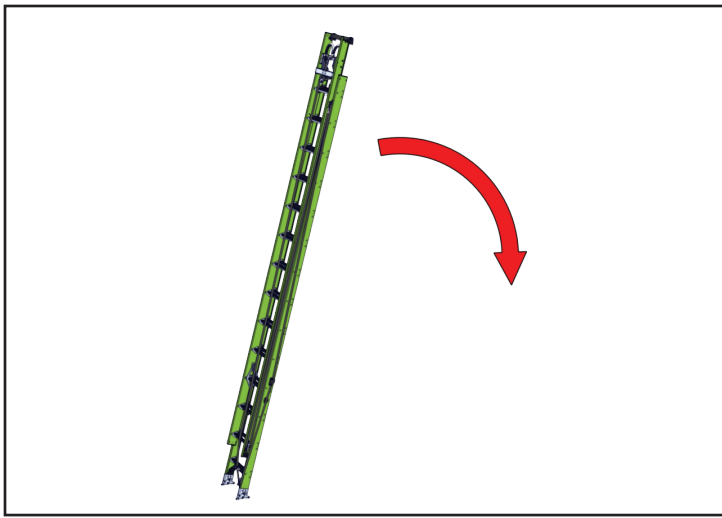


1. Lay the ladder down on the base section.

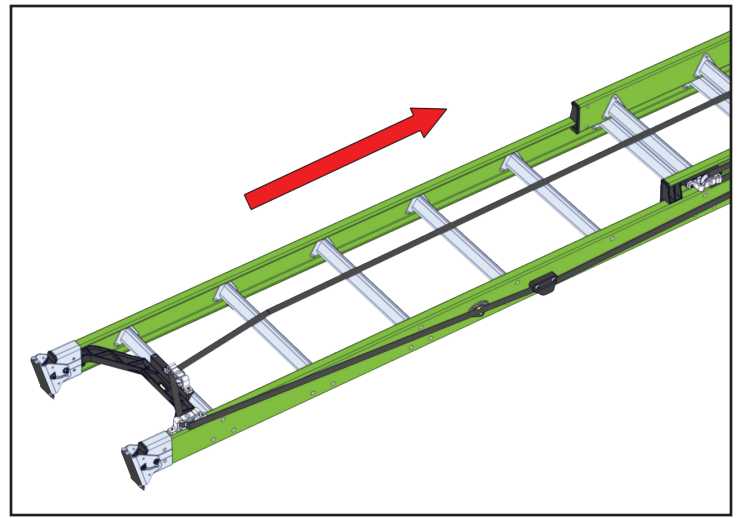


2. Extend the fly section past the 5th rung on the base section.

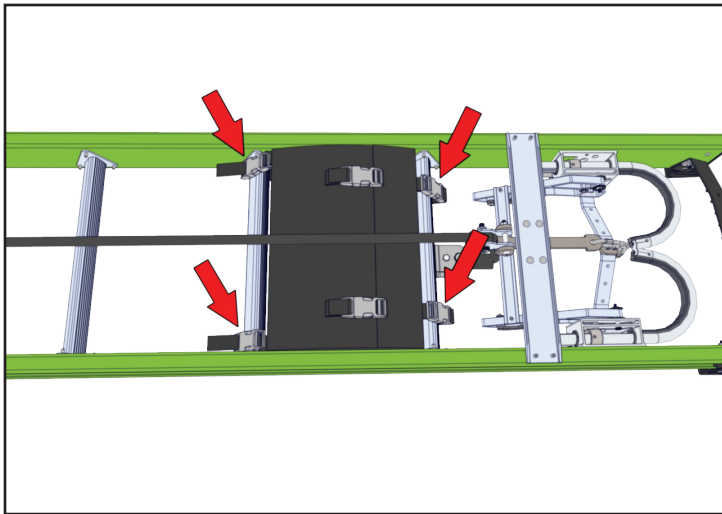


3. Clip and tighten the large bag to the top 2 rungs of the fly section as shown.

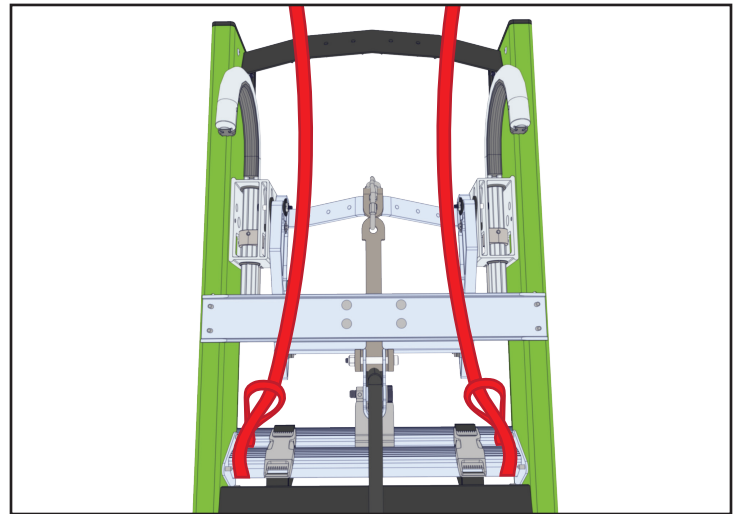

4. Remove the straps from the large bag, then loop the straps around the rung above the bag between the buckles and side rails as shown. Tuck the loose ends of the straps into the bag and close.

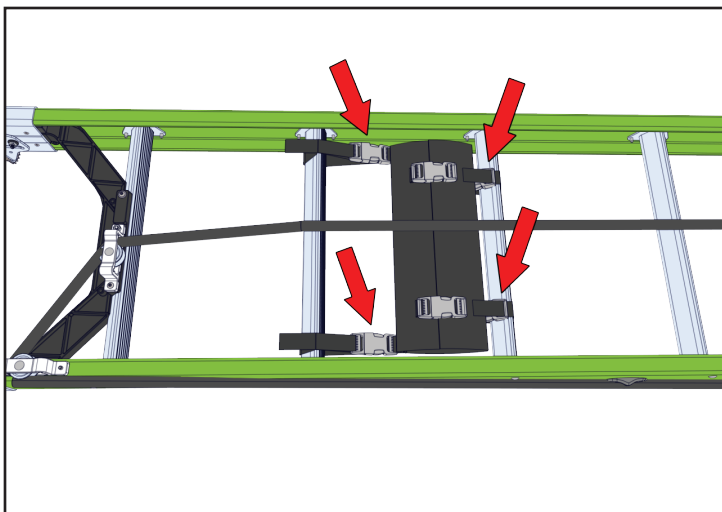

5. If applicable, clip and tighten the small bag to the 2nd and 3rd rungs up on the base section as shown. Make sure to tighten the bag as close to the 3rd rung as possible.

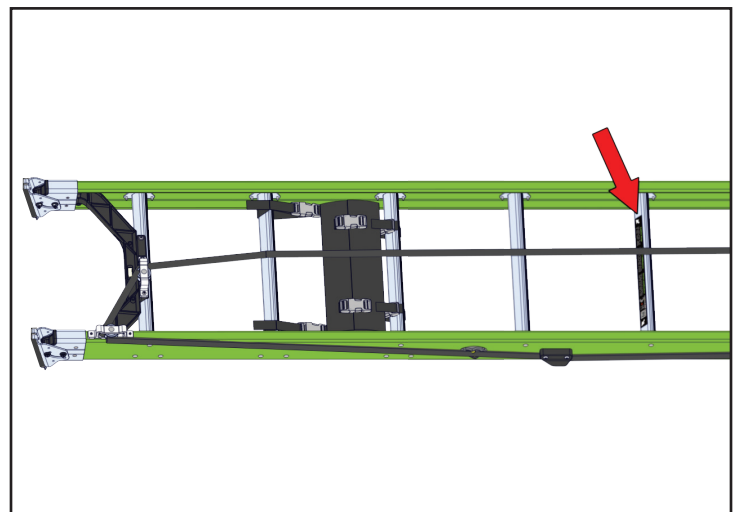


6. Center and apply the label to the bottom of the 5th rung up on the base section.

UTILITY POLE SETUP


RETAIN INSTRUCTIONS FOR FUTURE REFERENCE

WARNING: FOR POLE USE, STABILIZER STRAPS MUST BE USED. NEVER USE THE LIMITED ARREST SYSTEM WITH THE LADDER SET UP ON THE POLE WITHOUT PROPERLY SECURING THE LADDER WITH STABILIZER STRAPS.

1. After the stabilizer straps and ladder have been inspected, with the ladder in its storage position, shoulder-carry the ladder to the work area and lay it **face-up** on the ground near the pole. Deploy the hooks by pressing down toward the bottom of the ladder and rotating them into their pole-use position. Make sure the hooks lock in position and the CLAW[®] is in its completely open position.

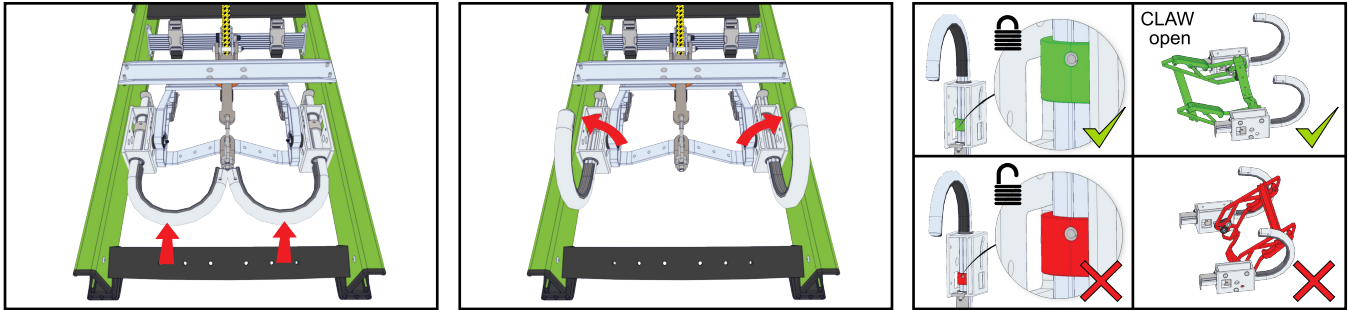


2. Rotate the ladder onto its side. Remove the stabilizer straps from the bag at the top of the ladder. Make sure both stabilizer straps are looped onto the top rung and against each side rail. Feed the straps through to the back side of the ladder between the top fly rung and the CLAW, making sure they stay above all base section rungs.

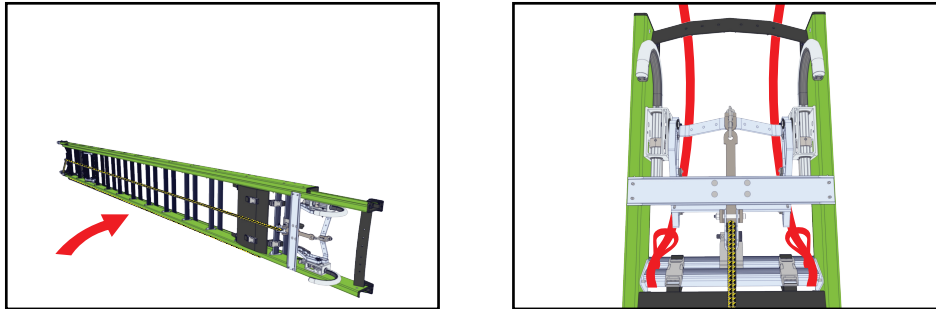


3. Walk the ladder up from its top end until the ladder is vertical. Stand the ladder within 2 ft (0.6 m) of the pole with the hooks away from the pole. Extend the ladder one rung at a time by pulling down on the rope on the side of the ladder that feeds into the pulley on the bottom rung, and letting the rung locks fully engage before repositioning your hand on the rope.


NOTE: NEVER WRAP THE ROPE AROUND YOUR HAND.

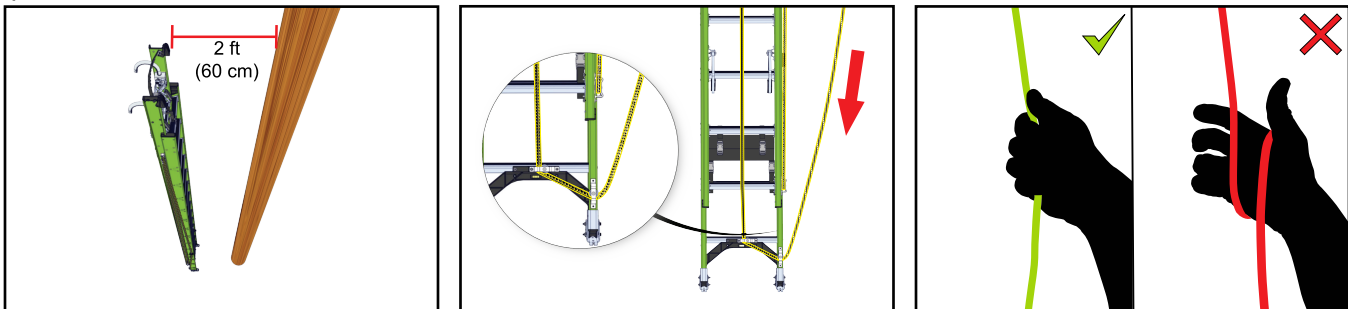


4. Set the ladder at the proper 75.5° climbing angle, and confirm with the bubble level on the right side rail.

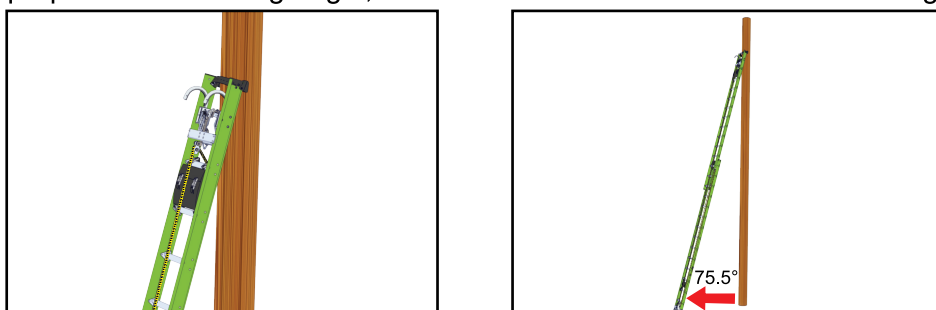

- If your ladder is equipped with SUMOSTANCE® outriggers or RATCHET™ levelers, adjust them once all previous steps are complete.
- Grab the stabilizer straps and cross them around the back side of the pole, forming an “X”. Keep the “X” as high as possible on the pole.



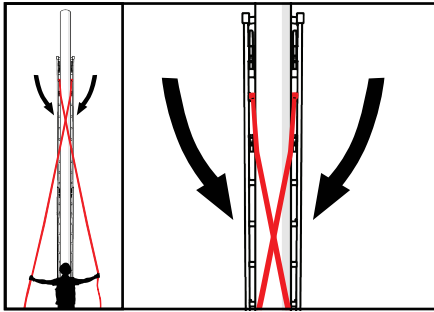


QR SAFETY SCEN™






SCAN THE QR CODE TO VIEW
STABILIZER STRAP SETUP VIDEO

- Take the clip end of one strap, feed it around the side rail below the 5th rung, and clip it to the D-ring. Partially tighten the strap with the cam buckle by pulling the loose end until it is taut. Repeat for the second strap. Tighten once both straps are connected.

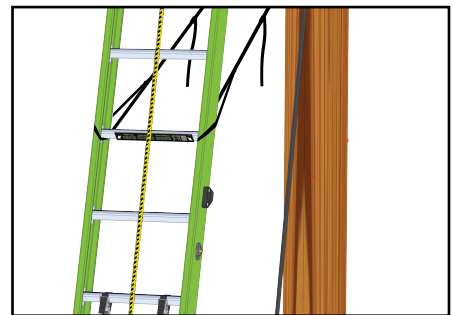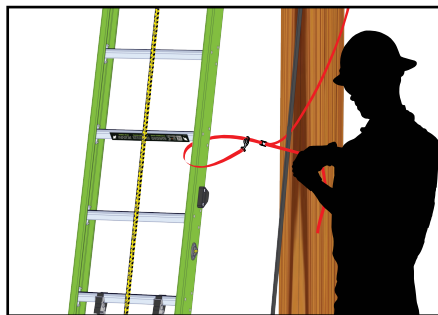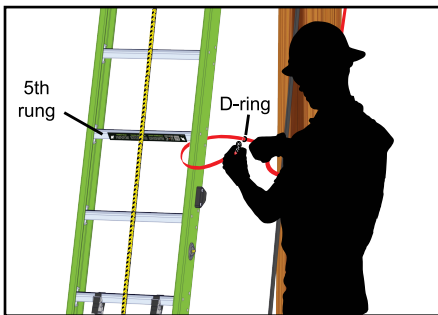


- To set up the lower stabilizer strap, remove it from its bag, clip one end of the strap below the 5th rung, then keeping the strap at the height of the 5th rung, walk loose end of the strap 1 ½ times around the pole, then back to the opposite side rail, clipping it around the rail below the 5th rung. Making sure both ends of the strap are up against the bottom of the 5th rung, tighten the straps with the cam buckles by pulling the loose ends of the straps until both are taut.

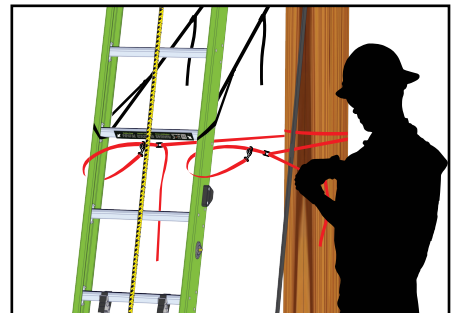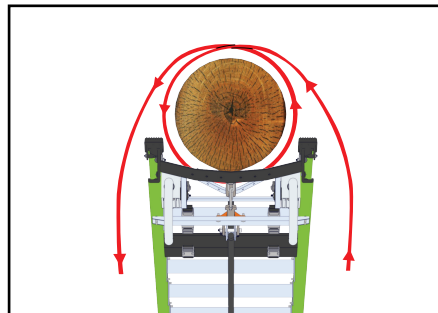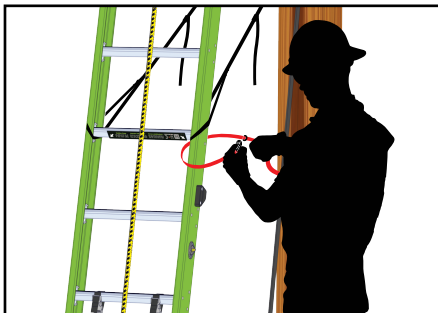


- Retighten the upper stabilizer straps, and make sure the ladder is solid and cannot twist, bounce, or flex before climbing.

NOTE: IF YOUR LADDER IS EQUIPPED WITH SUMOSTANCE® OUTRIGGERS, THE USE OF THE LOWER STRAP IS RECOMMENDED, BUT NOT REQUIRED.

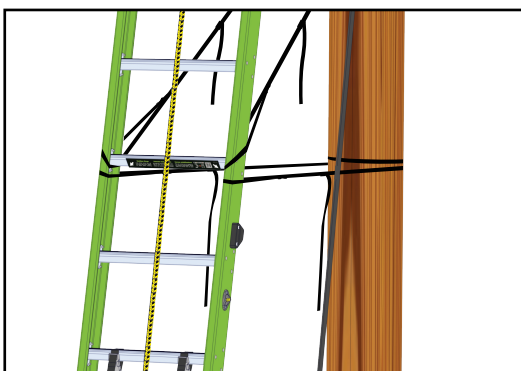

QR SAFETY SCEN™



SCAN THE QR CODE TO VIEW
LIMITED ARREST INSTRUCTIONS
& VIDEOS