

FLY END CAP REPLACEMENT

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

Procedure for replacing the fly end cap on Little Giant Ladder Systems **HYPERLITE™** and **HYPERLITE™ SUMOSTANCE®** ladders.

1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. Before installing this kit, identify all kit components. If any components are missing, damaged or if you have any questions concerning the use of this kit on Little Giant Ladder Systems products, please contact our Customer Experience Team at 800-453-1192. Do not substitute any components.
3. Inspect the ladder before installing this kit. Repair or replace any damaged or missing parts before using the ladder. Use only Little Giant Ladder Systems replacement parts. If you are unable to repair it, discard the ladder.

COMPONENTS IN KIT



(1) FLY END CAP



(1) 1-3/4" SCREW



(1) 1" SCREW



(2) 3/4" SCREWS



(4) WASHERS



(2) 3/16" THICK LOCK NUTS



(1) 1/8" THICK LOCK NUT

TOOLS NEEDED

DRILL WITH
13/64" DRILL BIT



HAMMER




CHISEL



3/16" PUNCH



3/8" WRENCH




1/8" ALLEN WRENCH




NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, PLEASE CONTACT OUR CUSTOMER EXPERIENCE TEAM FOR ASSISTANCE AT 800-453-1192.


DO NOT USE A DAMAGED LADDER!

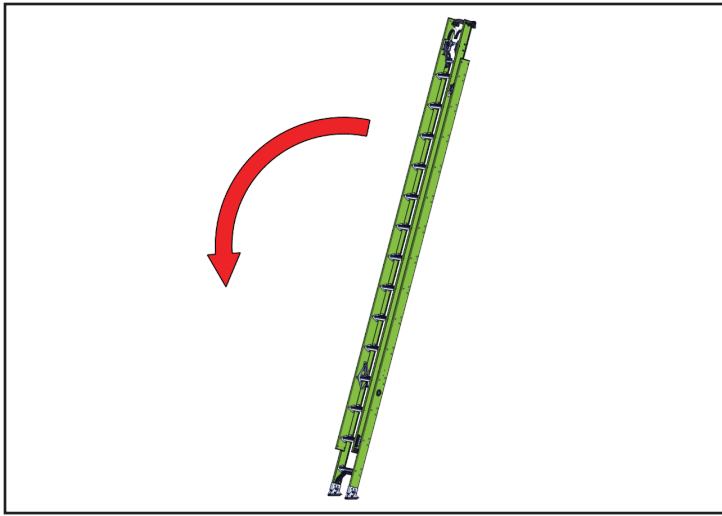


1. Lay the ladder down with the fly section facing the ground.

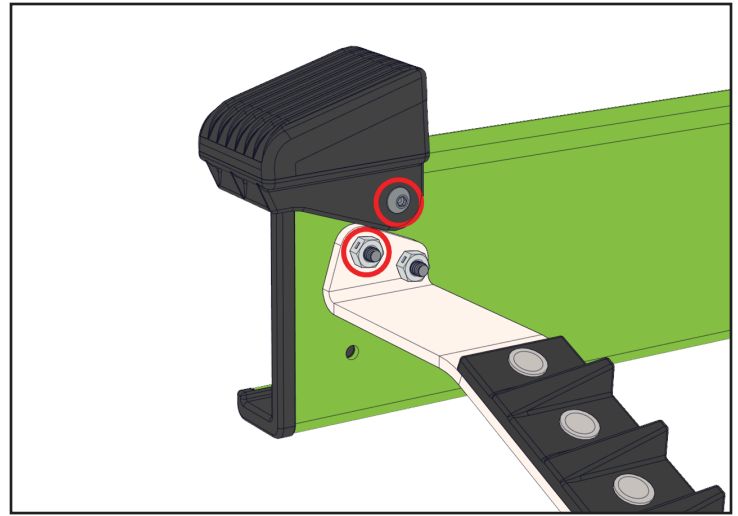


2. If applicable, remove and discard the old hardware shown using a 1/8" Allen wrench and 3/8" wrench.

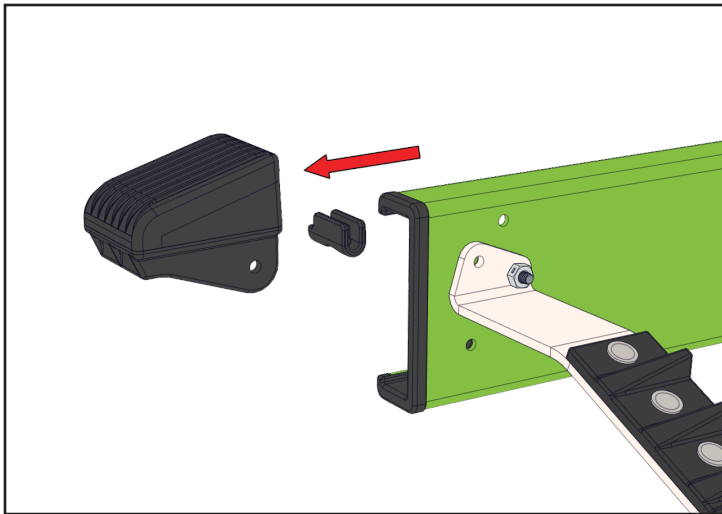


3. If applicable, slide off the wall pad and spacer. Set aside for later use.

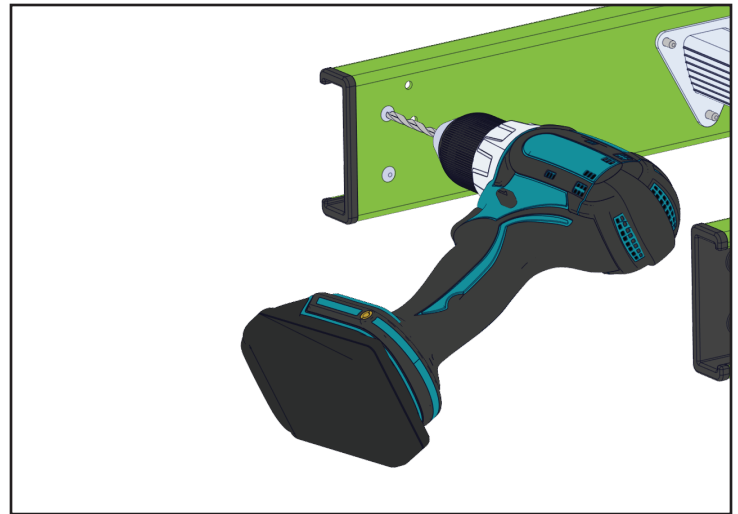


4. Using a drill and 13/64" bit, drill through the head of the rivet(s) securing the end caps.

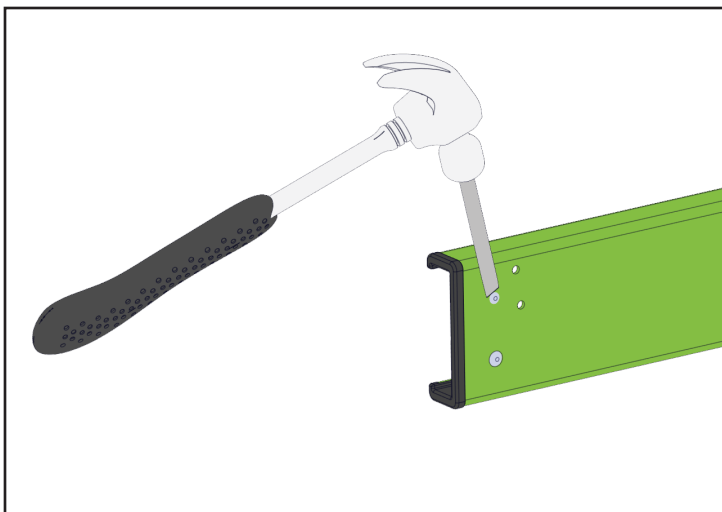


5. Use a hammer and chisel to remove any remaining rivet head material. Be careful not to damage the fiberglass rail.

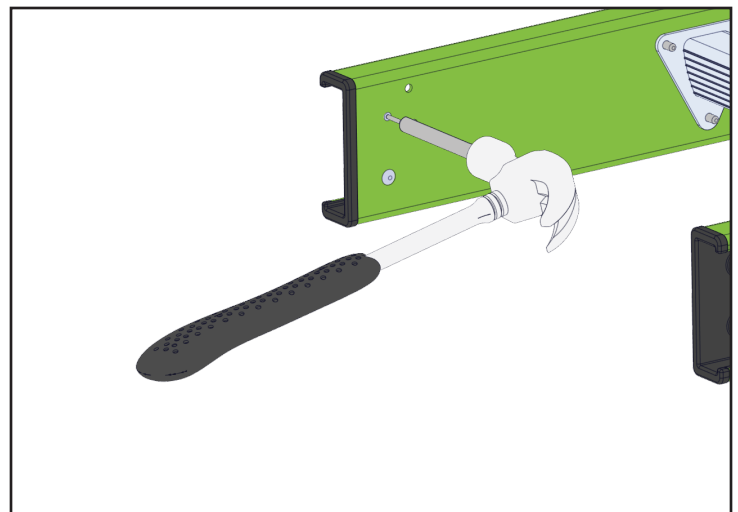


6. Use a hammer and punch to remove any remaining rivet material.

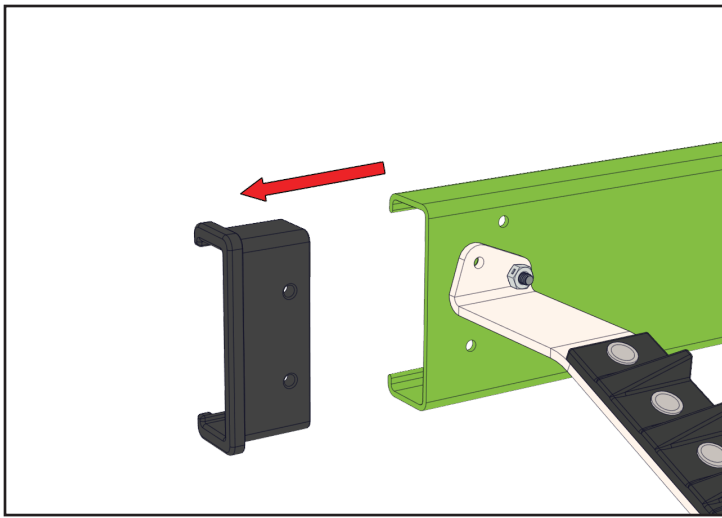


7. Remove and discard the old fly end cap.

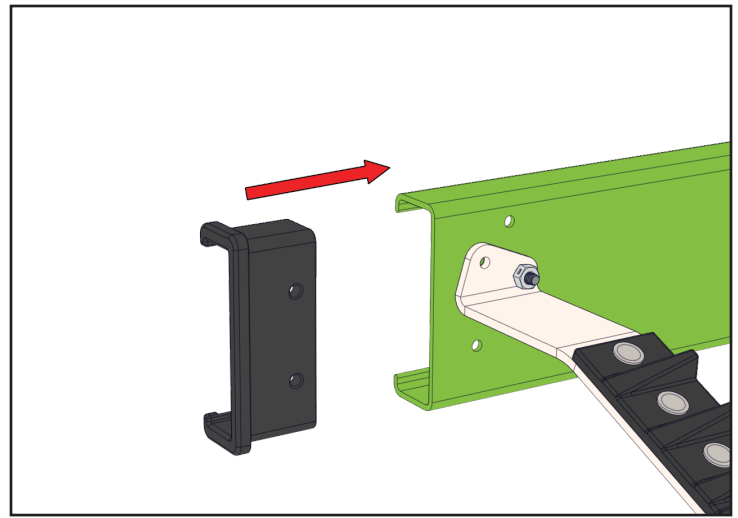


8. Slide the new cap into the rail.

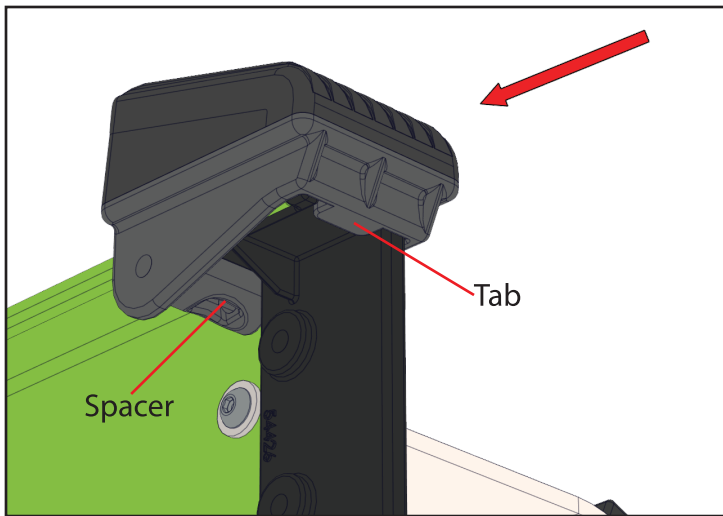

9. If applicable, line up the wall pad and spacer with the hole. Make sure the tab on the wall pad is inside of the rail.

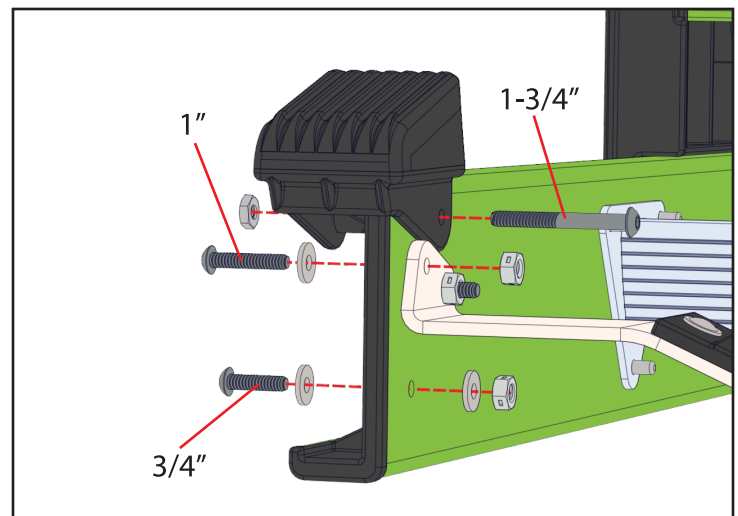

10. For ladders equipped with wall pad, pole strap, or V-bar: Using a 1/8" Allen wrench and 3/8" wrench, align and tighten the new hardware as shown.

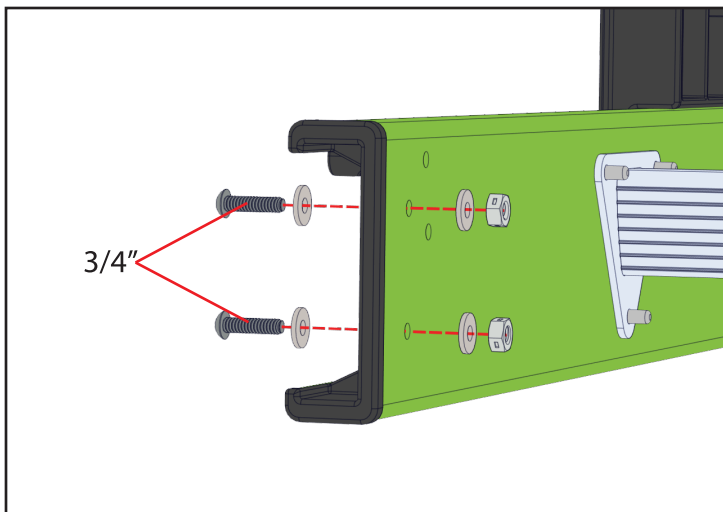

11. For ladders not equipped with wall pad, pole strap, or V-bar: Using a 1/8" Allen wrench and 3/8" wrench, align and tighten the new hardware as shown.



12. Make sure end cap and any accessories are tightly secured before use.