

Little Giant[®]

Ladder Systems

RUBBER SAFETY STRIPS INSTALL/REPLACEMENT

READ THESE INSTRUCTIONS COMPLETELY BEFORE YOU START. IF YOU DON'T UNDERSTAND THESE INSTRUCTIONS, PLEASE CALL 800-453-1192 FOR ASSISTANCE

1. Failure to comply with all instructions may result in serious injury.
2. Make sure this kit is compatible with your ladder. Before installing this kit, identify all kit components. If any components are missing, damaged or if you have any questions concerning the use of this kit on Little Giant Ladder Systems[®] products, please contact our Customer Experience Team at 800-453-1192. Do not substitute any components.
3. Inspect the ladder before installing this kit. Repair or replace any damaged or missing parts before using the ladder. Use only Little Giant Ladder Systems[®] replacement parts. If you are unable to repair it, discard the ladder.

COMPONENTS INCLUDED

SAFETY STRIP
LH [1] AND RH [1]



 SCREW [14]

 LOCKNUT [14]

 WASHER [28]

TOOLS REQUIRED



DRILL W/
3/16" BIT



HAMMER



3/8" WRENCH



1/8" ALLEN
WRENCH




CHISEL



PUNCH



MARKER



TAPE
MEASURE





SAFETY
GLASSES


NOTE: IF ANY OTHER PART OF THE LADDER IS DAMAGED BEFORE OR DURING THE PROCESS OF INSTALLING AND/OR REPAIRING, Please contact our customer experience team for assistance at 800-453-1192.

DO NOT USE A DAMAGED LADDER!

85295 v0 10.23 (1)

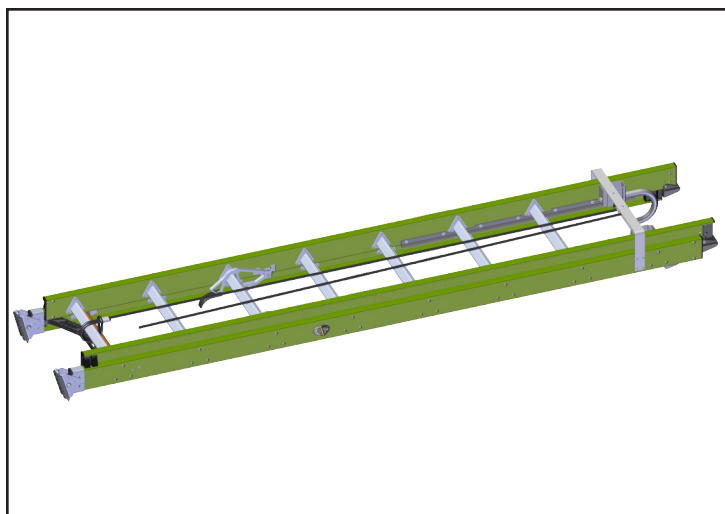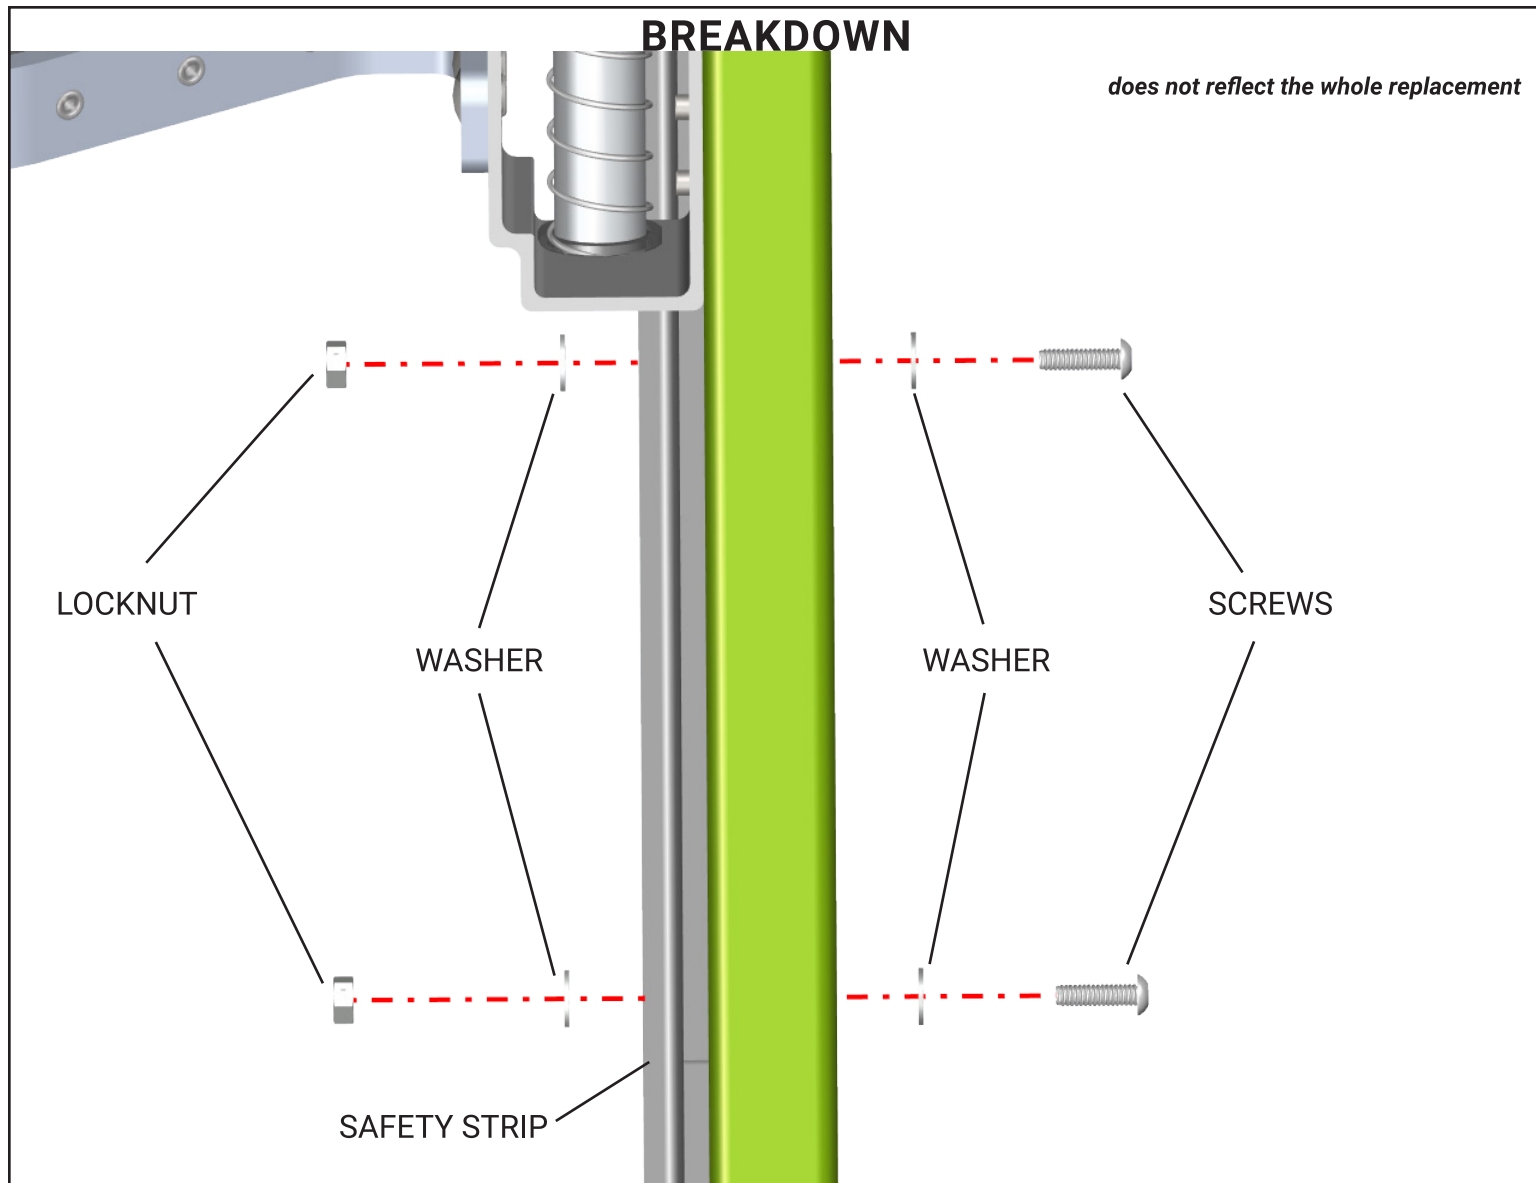


1. To make the following steps easier lay the ladder down on a flat surface. If you have a Utility Access ladder, skip to step 2.

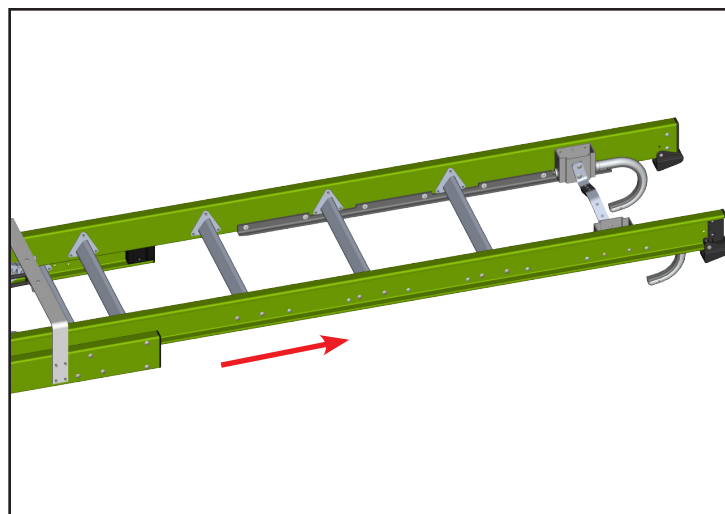


2. Extend the fly section 3 rungs past the base section.


**IF YOU ARE REPLACING SAFETY STRIPS CONTINUE TO STEP 3 BELOW.
IF YOU ARE INSTALLING SAFETY STRIPS, SKIP TO STEP 1 ON PAGE 5.**

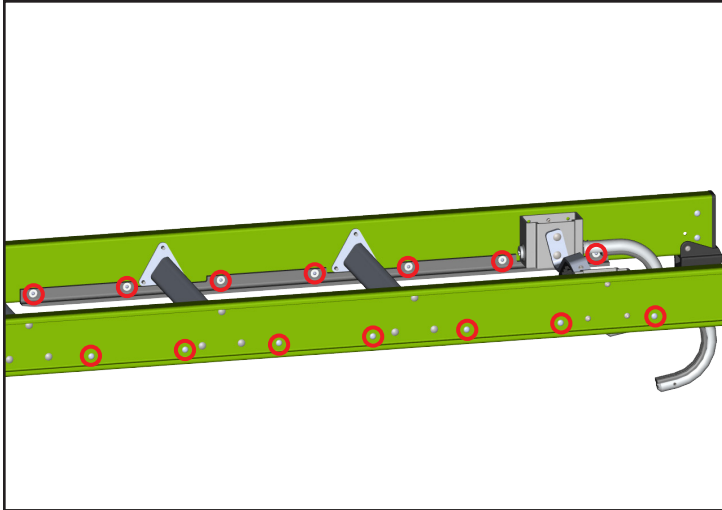


3. Identify the rivets to be removed.

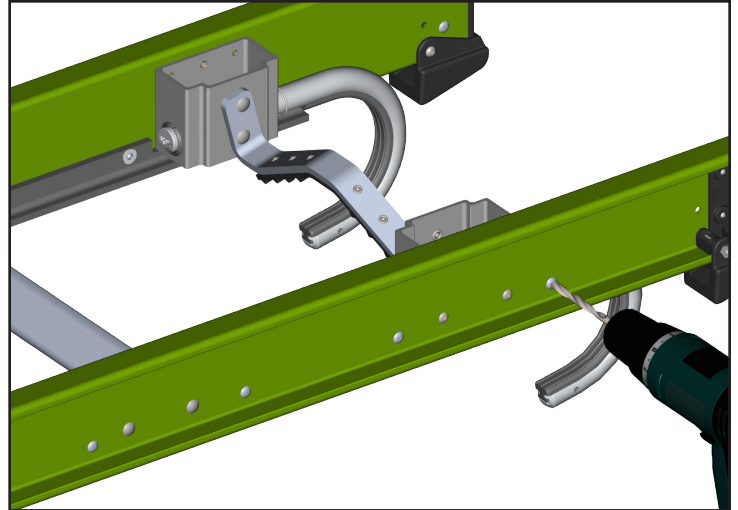


4. Drill through the head of the rivet using a drill with 3/16" bit. Take care not to damage the fiberglass rail.

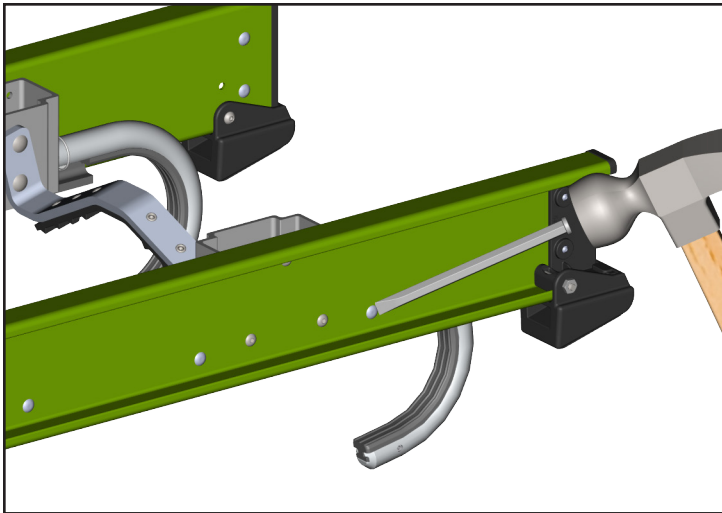


5. Use a hammer and chisel to remove any remaining rivet head material.

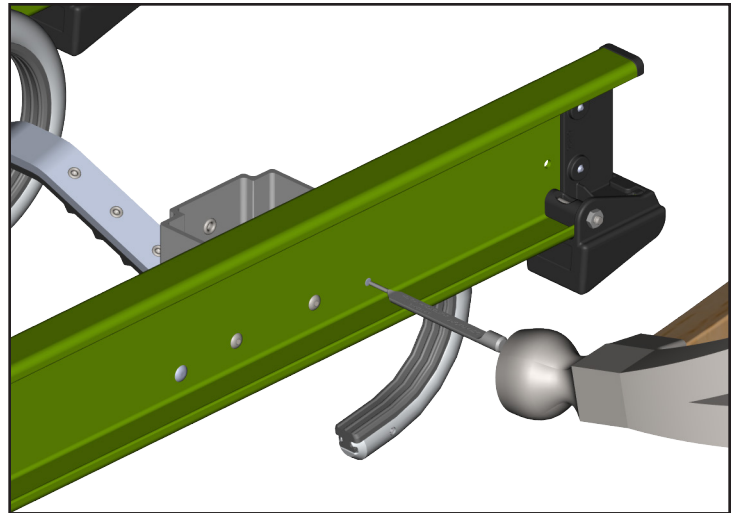


6. If needed, use a hammer and punch to remove rivet material left in the hole.

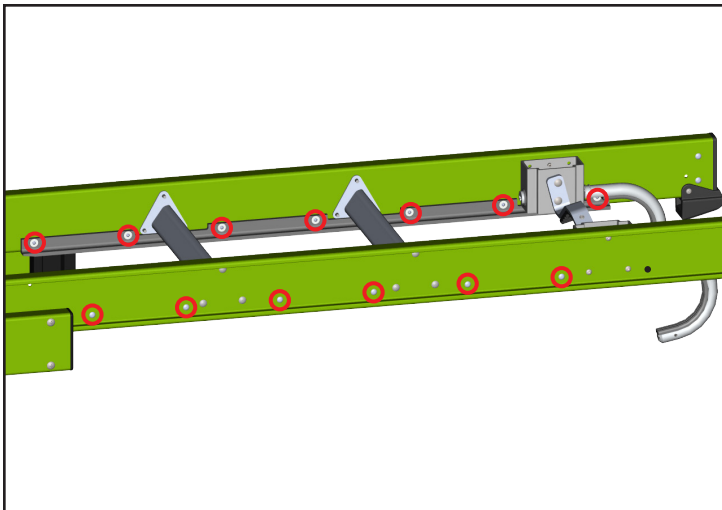


7. Repeat steps 4-6 until all rivets have been removed.

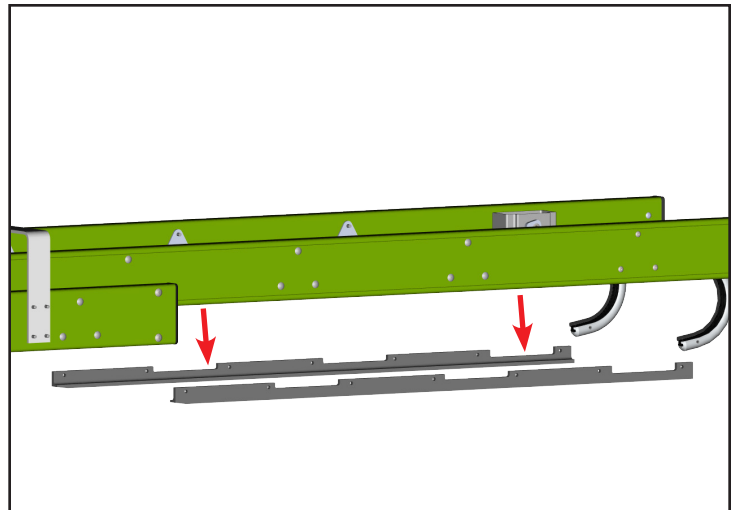


8. The existing safety strips can be removed and discarded along with any used hardware.

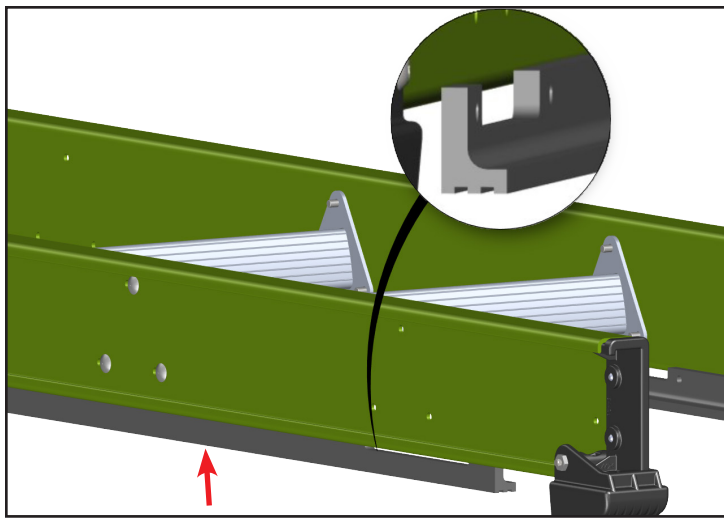


9. Align the flat edge of the new safety strip to the ladder as shown aligning the corresponding holes.

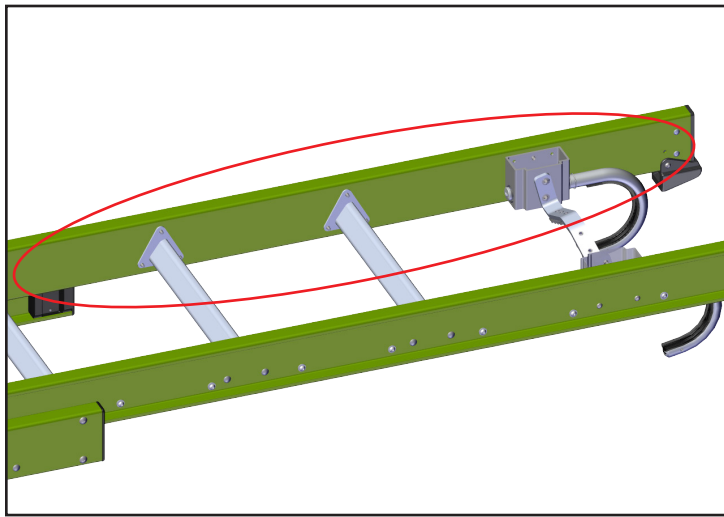

11. Repeat steps 9 and 10 on the opposite side.

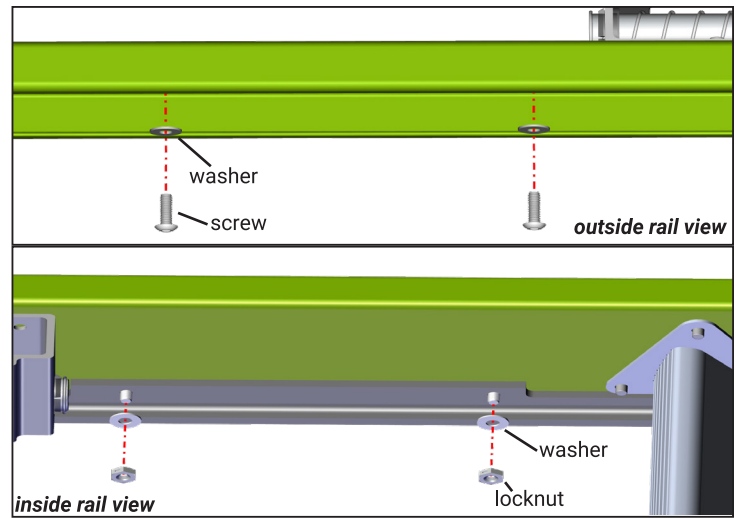


10. Using the new hardware provided, secure the new safety strip to the ladder as shown. Use a 3/8" wrench and 1/8" Allen wrench to tighten. Repeat until all hardware is fastened.

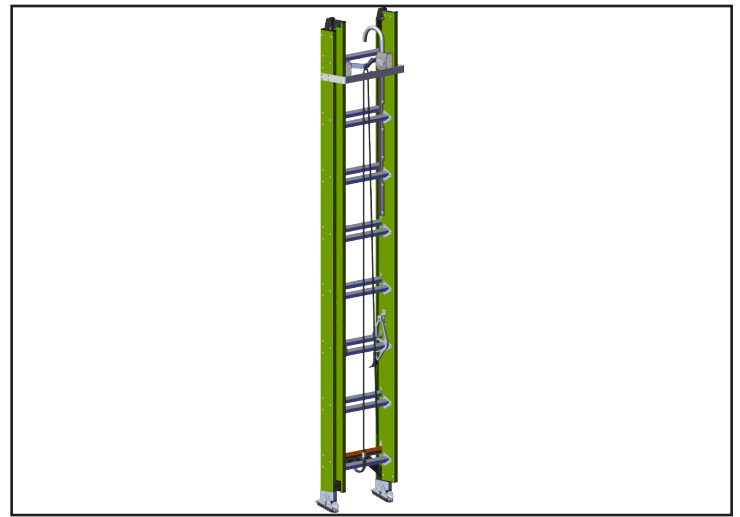


12. Make sure all components are secure before returning the ladder to service.

INSTALLING SAFETY STRIPS

*ladder shown without
claw system & rungs for
better view of placement.*

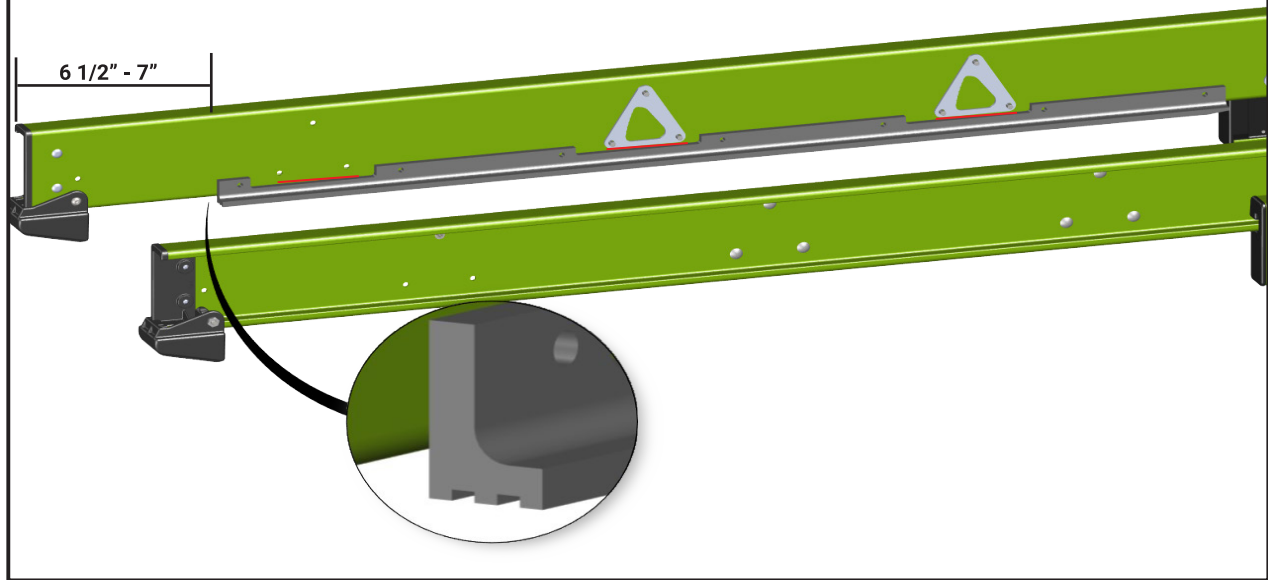

1. Take one of the safety strips and align the flat edge to the ladder as shown. The safety strip should start at 6 1/2" to 7" from the top of the end cap. Align the safety strip to run along the side of the rail using the rungs as guide. The safety strip will stick out a little as shown. Using a marker, mark the rail where the holes will be drilled. Repeat this step on both sides.

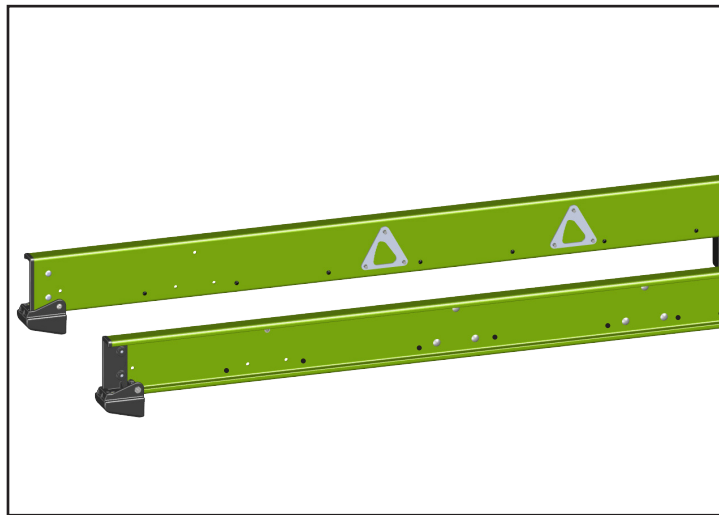

2. Using a 3/16" drill bit, drill through the rail at each marking. Take care not to damage the fiberglass rail. Go to step 9 on page 4 for final instructions.

Little Giant Ladder Systems, LLC.
1198 North Spring Creek Place
Springville, UT, 84663, USA

www.LittleGiantLadders.com

Toll Free: 800-453-1192
Phone: 801-489-3684
Fax: 801-489-3685

85295 v0 10.23 (5)